


Model Number:
(found on product box)



PORTABLE BASKETBALL SYSTEM

Owner's Manual

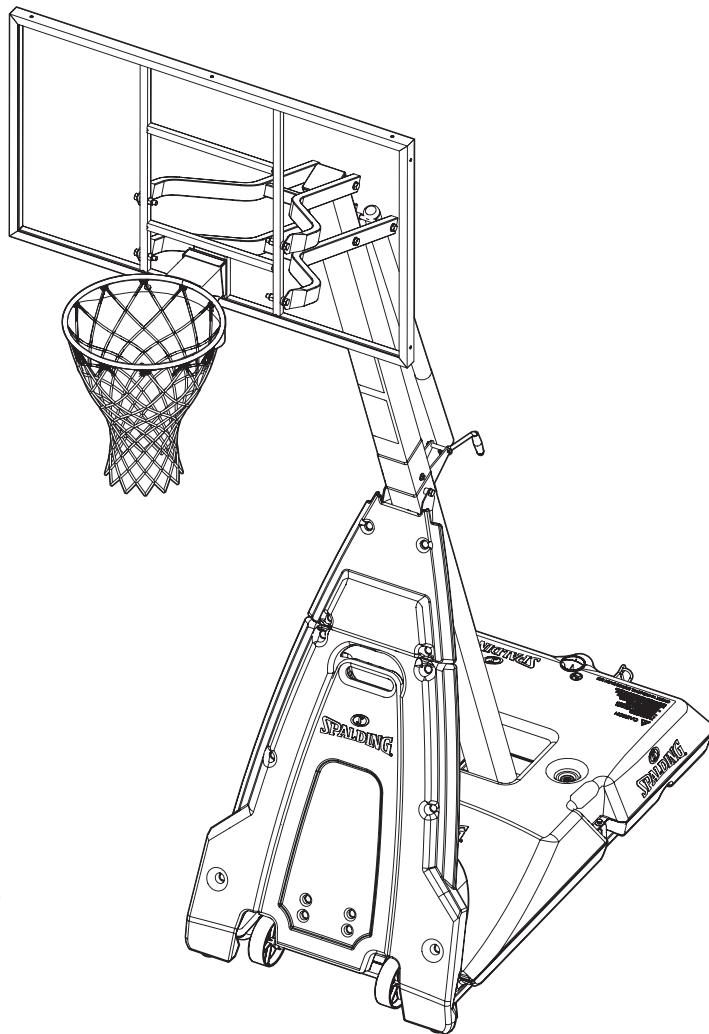

Toll-Free Customer Service Number

U.S.: 1-800-558-5234

Canada: 1-800-284-8339

Europe: +353 51 379777

Australia: 1300 367 582

www.spalding.com

WARNING



READ AND UNDERSTAND THE OPERATOR'S
MANUAL BEFORE USING THIS UNIT.
FAILURE TO FOLLOW THE OPERATING
INSTRUCTIONS COULD RESULT IN INJURY
OR DAMAGE TO PROPERTY.

Contents

Contents	2	Assemble the Base.....	12
Before You Begin.....	2	Assemble the Wheel Carriage.....	18
Contact.....	2	Elevator Assembly.....	22
Warranty.....	3	Assemble the Upper Elevator	24
Safety Information	3	Assemble the Goal	29
Test-Fit Close Tolerance Bolts	4	Install The Stadium Pad.....	34
Package Contents.....	4	Secure The Assembled Unit for Use	36
Tools & Materials for Assembly.....	10	Operation	38
Assembly Overview.....	11	Parts List	39



Questions or Missing Parts?

DON'T go back to store!


Call TOLL-FREE Customer Service
Number listed on the front page!



Before You Begin

READ AND UNDERSTAND THE OPERATOR'S MANUAL
BEFORE USING THIS UNIT.

- Remove **ALL** contents from boxes.
- Be sure to check **INSIDE** pole sections; hardware and additional parts are packed inside.
- This manual, accompanied by a sales receipt, should be saved and kept on hand as a convenient reference, as it contains important information about your model.

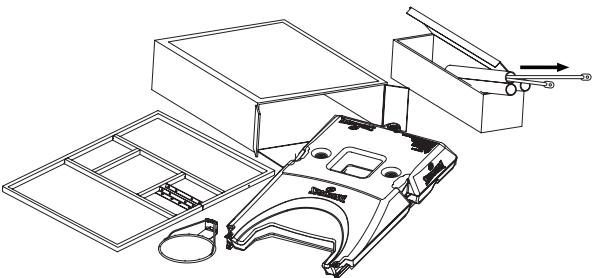

WARNING

FAILURE TO FOLLOW OPERATING INSTRUCTIONS COULD RESULT IN INJURY OR PROPERTY DAMAGE.

Contact

Questions or missing parts? Do **NOT** go back to the store!

Email:	warrantyservice@custserv.fotlinc.com
Customer Service Toll-Free Number:	1-800-558-5234
Mailing Address:	Spalding PO Box 90015 Bowling Green, KY 42102

Warranty

For the very latest Basketball System Warranty information, please visit www.Spalding.com or call Spalding Customer Service at **1-800-558-5234**.

Safety Information

WARNING

FAILURE TO FOLLOW THESE SAFETY INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID THE WARRANTY.

Owner must ensure all players know and follow these rules for safe operation of the system.

To ensure safety, do not attempt to assemble this system without following the instructions carefully. Check the entire box and inside all of the packing material for parts and/or additional instruction material. **Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document.** Proper and complete assembly, use, and supervision are essential for proper operation and to reduce the risk of accident or injury. A high probability of serious injury exists if this system is not installed, maintained, and operated properly.

- If using a ladder during assembly, use extreme caution.
- Check the base regularly for leakage. Slow leaks could cause the system to tip over unexpectedly.
- Seat the pole sections properly (if applicable). Failure to do so could allow the pole sections to separate during play and/or during transport of the system.
- Climate, corrosion, or misuse could result in system failure.
- If technical assistance is required, contact Customer Service.
- Minimum operational height is 6'-6" (1.98 m) to the bottom of backboard.

Most injuries are caused by misuse and/or not following instructions.

Use caution when using this unit.

NOTICE

- **Adult assembly required.**
- Dispose of **ALL** packaging materials promptly.
- As with all products, periodically inspect for loose, small parts.
- Assembled unit **MUST** be filled with sand or water at **ALL** times.
- **ALL** basketball systems, including those used for DISPLAYS, **MUST** be assembled and installed according to instructions.
- Failure to follow instructions could result in **SERIOUS INJURY**.
- It is **NOT** acceptable to devise a makeshift support system.

NOTE


Backboard style will vary.

Test-Fit Close Tolerance Bolts

To ensure optimal playability of the backboard system, a close tolerance fit between the elevator components and hardware is required. Test-fit large bolts into large holes of elevator tubes, backboard brackets, and triangle plates. Carefully rock them in a circular motion to remove any excess paint from holes, if necessary.

NOTE

Not all items pictured are included with every model.

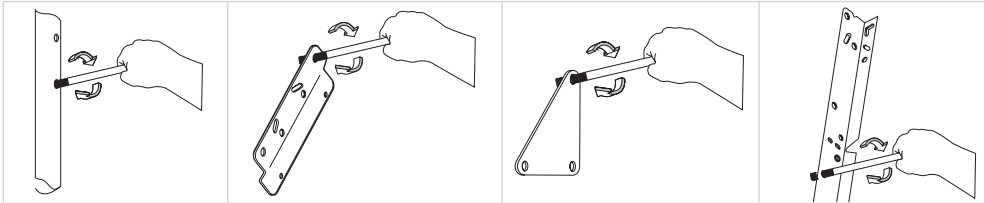


Package Contents

Check the contents of each kit and other parts to ensure that all components are present. Keep the kit hardware in the labeled bag as they will be used in different assembly steps.




See "Parts List" on page 39 for a complete list of replacement part numbers.

BASE ASSEMBLY







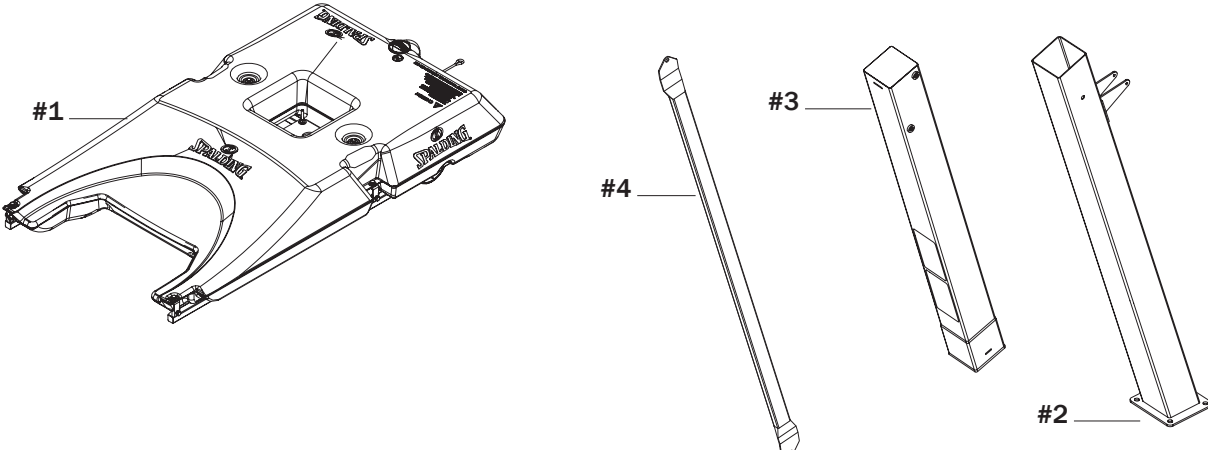


1	Base (x1)	2	Bottom Pole Section (x1)	3	Top Pole Section (x1)
4	Strut, Front (x2)				

KIT 1 - 208745

					
					
					
5	Bolt, Hex Head, 5/16-18 x 4.5" Long (x1)		6	Nut, Acorn, 5/16-18 (x1)	
			7	Washer, Flat, 5/16 (x2)	

KIT 2 - BASE ASSEMBLY - BA00003

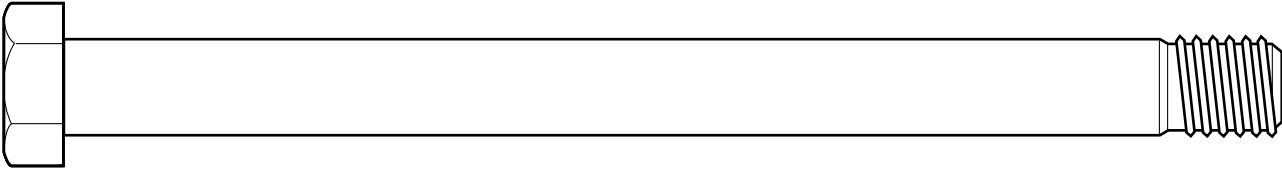			
#9 _____	#13 _____	#14 _____	#10 _____
			
#8 _____			
	#11 _____	#12 _____	
8	Bolt, Hex Head, 1/2-13 x 6\" data-bbox="48 731 261 796">Long (x1)	9	Bolt, Hex Head, 3/8-16 x 1\" data-bbox="343 751 628 776">Long (x2)
11	Lock-nut, Nylon Insert, 3/8-16 (x4)	12	Plastic Spacer, 0.53\" data-bbox="343 841 628 906">ID x 0.63\" Long, Black (x2)
14	Lock-washer, 3/8 (x2)	13	Washer, Flat, 3/8 (x8)

WHEEL TO BASE ASSEMBLY

Diagram showing the components for the Wheel to Base Assembly:

- #15: Wheel, 6" (x2)
- #16: Transport Handle, Plastic (x1)
- #17: U-Bracket, Pivot (x1)
- #18: Bracket, Wheel (x1)
- #19: Bracket, Pivot, Lower (x1)
- #20: Disk, Pivot, Plastic (x1)
- #21: Cross Member (x1)
- #22: Axle, Rod, 20.5" Long (x1)
- #23: Tube, Hinge (x2)

15	Wheel, 6" (x2)	16	Transport Handle, Plastic (x1)	17	U-Bracket, Pivot (x1)
18	Bracket, Wheel (x1)	19	Bracket, Pivot, Lower (x1)	20	Disk, Pivot, Plastic (x1)
21	Cross Member (x1)	22	Axle, Rod, 20.5" Long (x1)	23	Tube, Hinge (x2)


KIT 3 - WHEEL ASSEMBLY - BA00005

Diagram showing the components for Kit 3 - Wheel Assembly:


- #11: Lock-nut, Nylon Insert, 3/8-16 (x2)
- #24: Bolt, Hex Head, 3/8-16x1L (x1)
- #25: Bolt, Hex Head, 3/8-16x2.5L (x2)
- #26: Bolt, Hex Head, 3/8-16 x 3" Long (x2)
- #27: Bolt, Hex Head, 3/8-16x4.5L (x1)
- #28: Bolt, Carriage, 3/8-16 x 2 (x8)
- #30: Nut, Hex-Flange, 3/8-16 (x12)
- #31: Axle Nut (x2)
- #32: Spacer, 0.379IDx0.50Dx3.5L (x1)
- #33: Washer, 3/8 Flat (x4)

11	Lock-nut, Nylon Insert, 3/8-16 (x2)	24	Bolt, Hex Head, 3/8-16x1L (x1)	25	Bolt, Hex Head, 3/8-16x2.5L (x2)
26	Bolt, Hex Head, 3/8-16 x 3" Long (x2)	27	Bolt, Hex Head, 3/8-16x4.5L (x1)	28	Bolt, Carriage, 3/8-16 x 2 (x8)
30	Nut, Hex-Flange, 3/8-16 (x12)	31	Axle Nut (x2)	32	Spacer, 0.379IDx0.50Dx3.5L (x1)
33	Washer, 3/8 Flat (x4)				


ELEVATOR ASSEMBLY




#36




#37



#34




#35




#38

34	Handle, Screw-Jack (x1)	35	Screw Jack (x1)	36	Sleeve, Screw Jack (x1)
37	Cap, Screw Jack (x1)	38	Pin, Handle (x1)		

KIT 4 – ELEVATOR TO POLE ASSEMBLY – EL00002




#39




#40

39	Bolt, Hex-Head, 5/16-18x2.75L (x1)	40	Lock-Nut, Nylon Insert, 5/16-18 (x1)
----	------------------------------------	----	--------------------------------------


BACKBOARD ASSEMBLY




#41




#43



#44

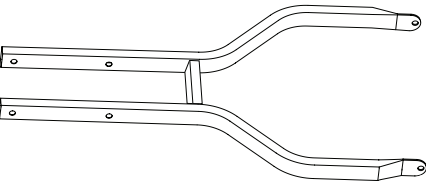

#42



#45

41	Elevator Tube, Upper (x1)	42	Elevator Tube, Lower (x1)	43	Backboard (x1)
44	Base Cap (x1)	45	Pole Cap (x1)		

KIT 5 – BACKBOARD – AR00003

#46

#47

#10

#49

#50

#51

10	Lock-nut, Nylon Insert, 1/2-13 (x7)	46	Bolt, Hex-Head, 1/2-13 x 7.5" Long (x3)	47	Bolt, Hex-Head, 1/2-13 x 2.50" Long (x4)
49	Bushing, Plastic, 0.50" I.D. x 0.25" Long (x8)	50	Washer, Flat, 1.08" O.D. (x14)	51	Spacer, 0.53" ID x 1.19" Long, Plastic, Black (x2)

GOAL ASSEMBLY


#52

#53


#54

#55


KIT 6 – GOAL – 222700

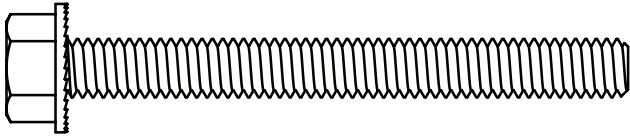

#56




#13




#58

13	Washer, Flat, 3/8 (x4)	56	Bolt, Hex-Flange, 5/16-18x3L (x4)	58	Nut, Hex-Flange, 5/16-18 (x4)
----	------------------------	----	-----------------------------------	----	-------------------------------


KIT 7 – GOAL – 26809003

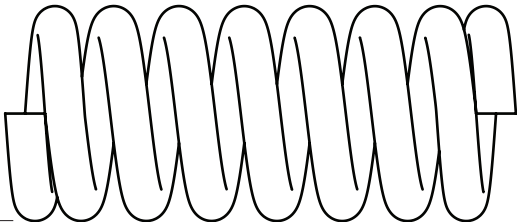


#64




#61




#62

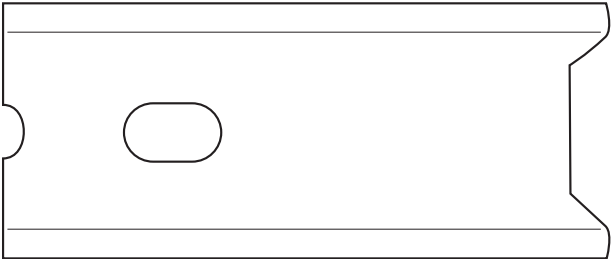


#63




#60



#66

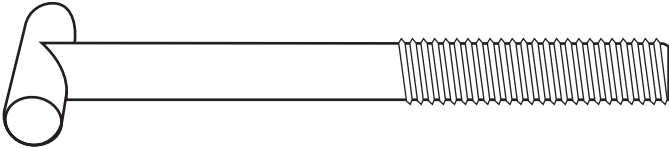

#59



#65

59	T-Bolt 3/8-16 x 3" Long (x1)	60	Screw, Self Tapping, 1/4" (x2)	61	Rim Bracket, Black (x1)
62	Rim Cover (x1)	63	Spring Bracket, Zinc (x1)	64	Spring (x1)
65	Washer, 9/16" (1)	66	Hex Nut 3/8-18 (1)		

STADIUM PAD ASSEMBLY

HEIGHT ADJUSTMENT

Rotate crank handle to raise and lower backboard.

Do not over crank handle beyond the manufactured height indicator range of 7'-10" - 10' feet. Damage may be caused to the screw jack's internal mechanism if adjusted over 10' or under 7'-10" feet.

MOVING SYSTEM

1. Adjust basketball backboard height to desired position.
2. Rotate handle forward until wheels engage ground.
3. Move basketball system to desired location.
4. Rotate handle back to original position.
5. Check system for stability.

48	Label, Height Indicator (x1)	57	Label, Height Adjustment and Moving (x1)	67	Stadium Pad, Bottom (x1)
68	Stadium Pad, Top (x1)	69	Ground Stake (x1)		


KIT 8 – BOARD PAD HARDWARE – AC00002

29	Bolt, Carriage, 3/8-16x2.75L (x10)	30	Nut, Hex-Flange, 3/8-16 (x10)
----	------------------------------------	----	-------------------------------

Tools & Materials for Assembly

2 Capable Adults	Mallet	Safety Glasses	Socket Wrench 1/2", 9/16", 3/4"	Socket Wrench Extension	Wrench 1/2", 9/16", 3/4"
Tape Measure	Phillips Screwdriver #3	Sawhorse	Step Ladder (8 ft.)	Scrap Wood Board	Sand/Garden Hose
					(OPTIONAL) Adjustable Wrenches

Assembly Overview

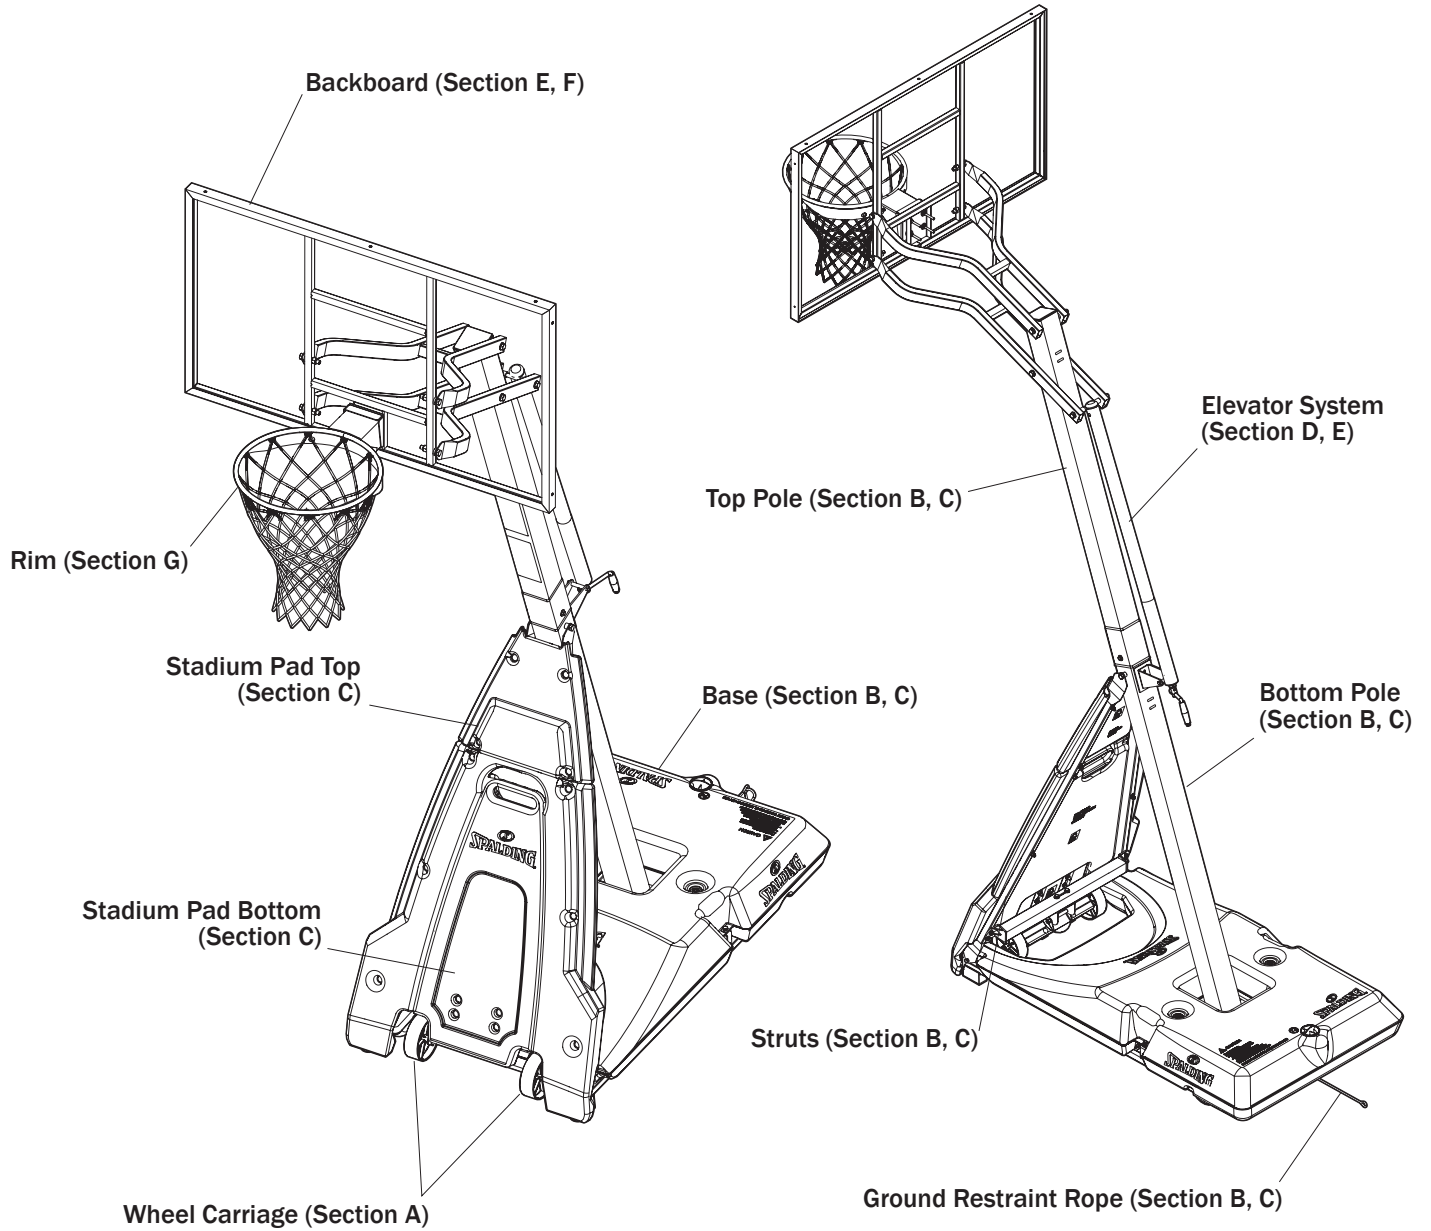


Assemble the Base

Required Parts:

- Kit 1
- Kit 2
- Scrap Wood Board
- 1/2", 9/16", 3/4" Socket Wrench or Wrench
- Socket Extension
- Mallet




Completed Base Assembly:

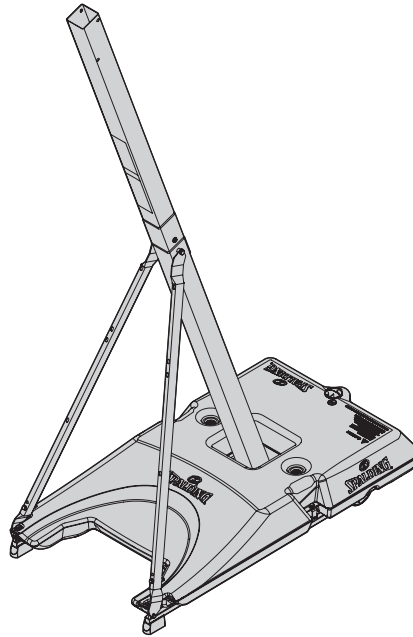

⚠ WARNING ⚠

The following components are factory pre-assembled. CHECK THE PRE-ASSEMBLED AREAS FOR TIGHTNESS. If any parts are missing or damaged please contact our customer service department to receive replacement parts (see customer service information).

PRE-ASSEMBLED COMPONENTS

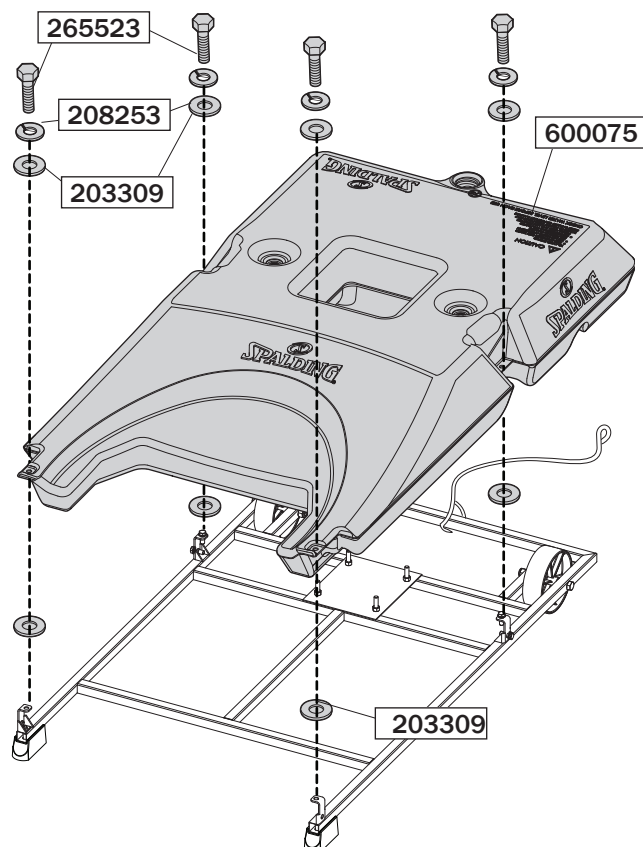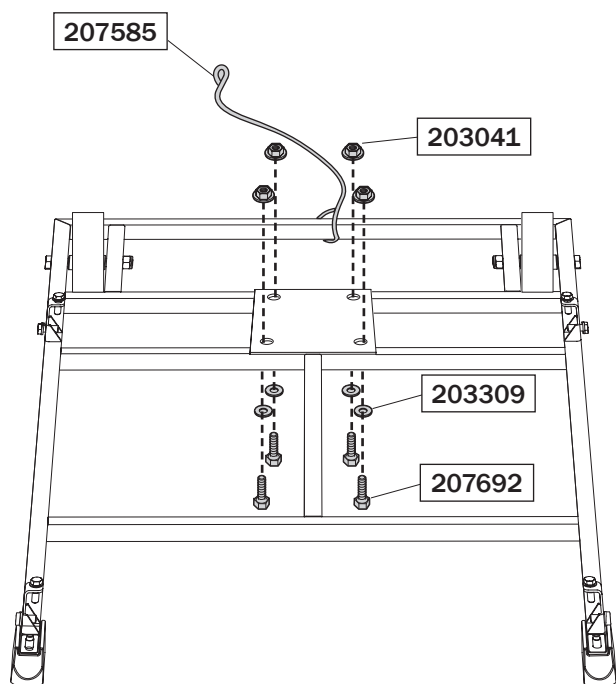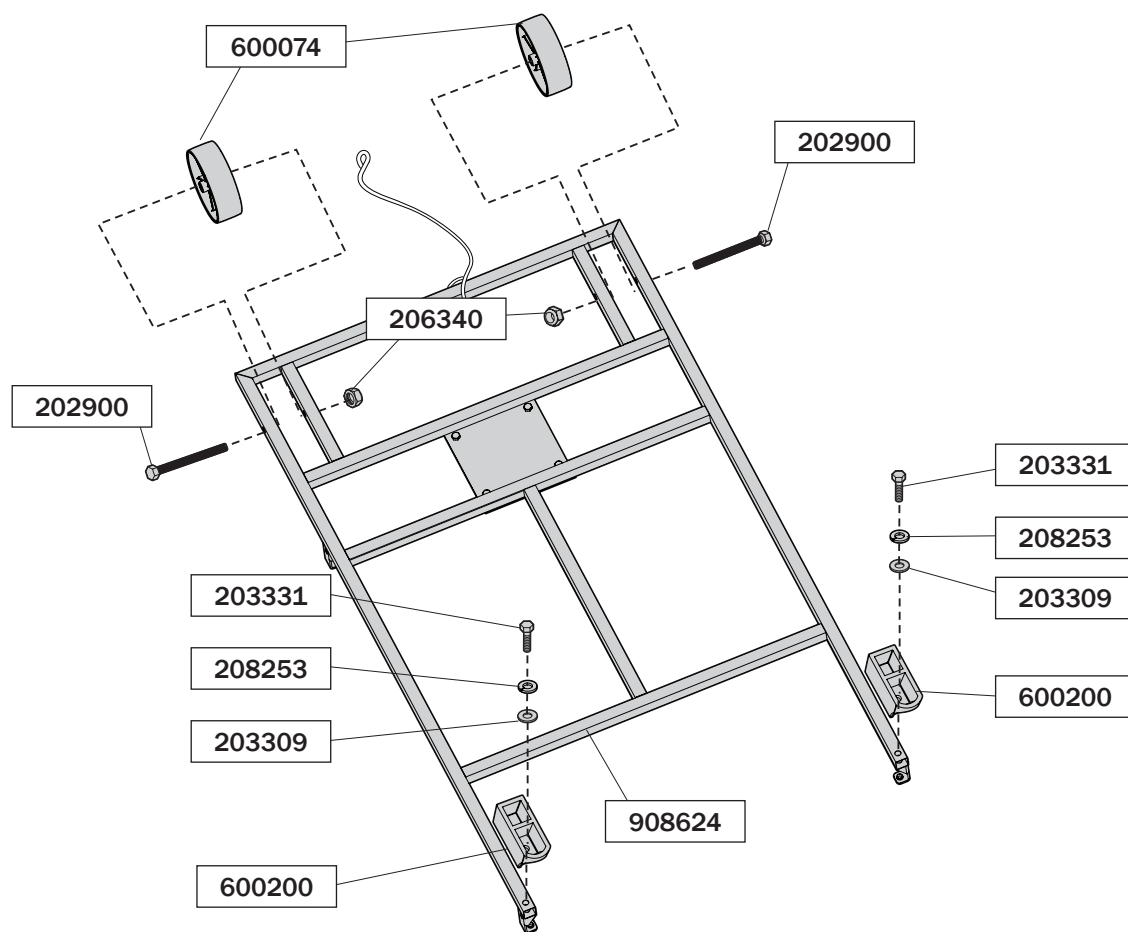


A


ASSEMBLE THE POLE

1. Identify the top (3) and bottom (2) pole sections.
2. Mark 4-5" (10-12.7 cm) from the top of the bottom (2) pole section.

4-5"
(10-12.7 cm)

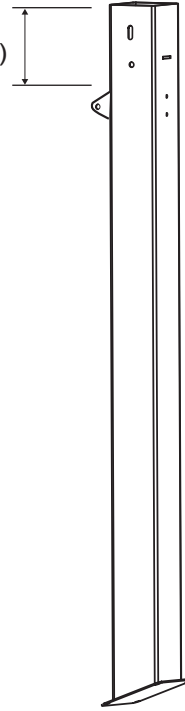

#2



#3


A**ASSEMBLE THE POLE****⚠ CAUTION ⚠**

WHEN PROPERLY POUNDED TOGETHER, THE POLE SECTIONS SHOULD HAVE A **4-5" (10-12.7 CM)** OVERLAP. IF MINIMUM POLE ENGAGEMENT OVERLAP OF **4-5" (10-12.7 CM)** CANNOT BE ACHIEVED !! STOP !! DO NOT PROCEED TO THE NEXT STEP! - CALL SPALDING CUSTOMER SERVICE AT **1-800-558-5234** FOR ASSISTANCE.

⚠ IMPORTANT ⚠

NOTE THE ORIENTATION OF EACH POLE SECTION. POSITION EACH POLE SECTION SO THAT THE FRONT AND REAR FACES MATCH DIRECTION WHEN ASSEMBLED.

3. Align the top (3) pole section with the bottom (2) pole section and slide together.
4. Bounce the assembled sections on a scrap wood board until the overlap reaches the marked line.
5. Secure the pole sections together using the bolt (5), washers (7), and nut (6).

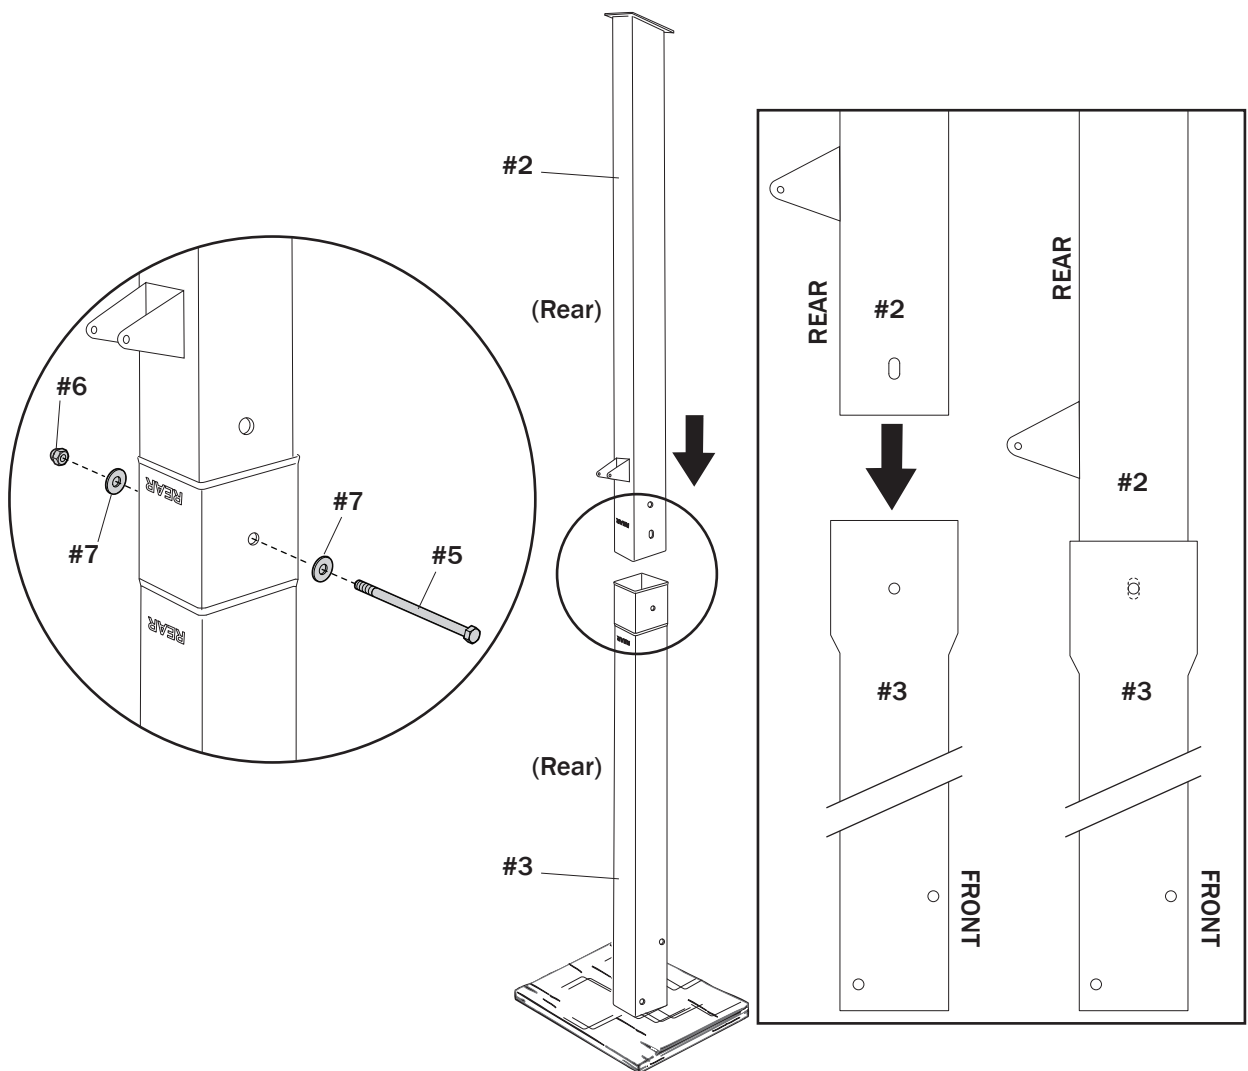


B INSTALL THE POLE ONTO THE BASE

1. Place the washers (13) onto the pre-installed bolts.
2. Insert the bottom pole (2) onto the pre-installed bolts through the holes in the bottom pole.
3. Secure the pole assembly to the pole mounting plate using the washers (13) and nuts (11).



WARNING

TWO PEOPLE ARE REQUIRED FOR THIS PROCEDURE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

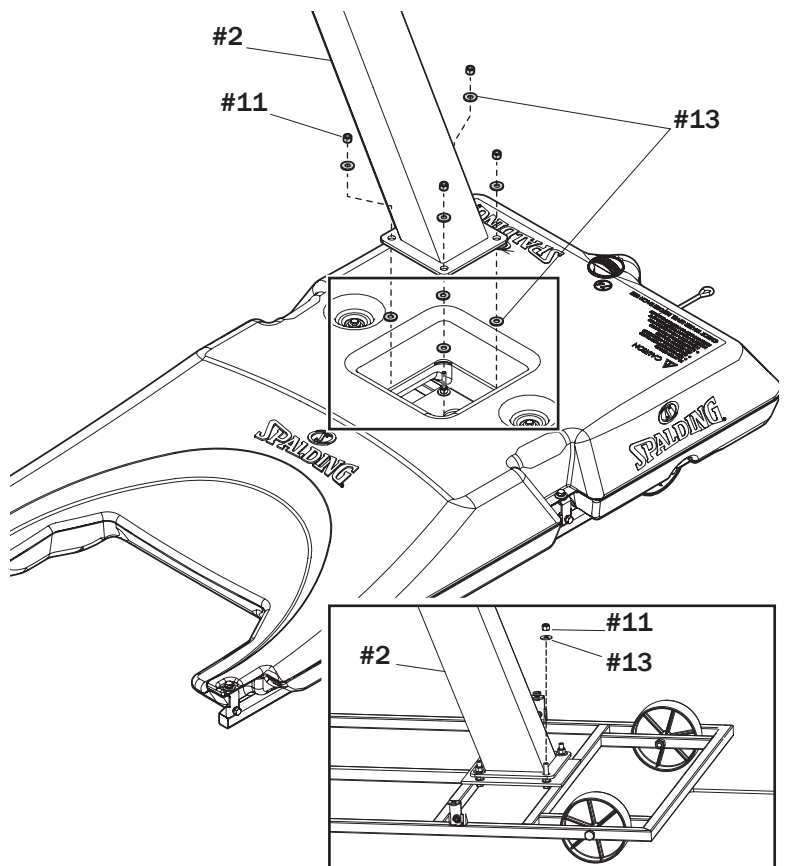


4. Secure the base struts (4) to the bottom pole (2) using the bolt (8), spacers (12), and nut (10).



IMPORTANT

DO NOT TIGHTEN COMPLETELY.

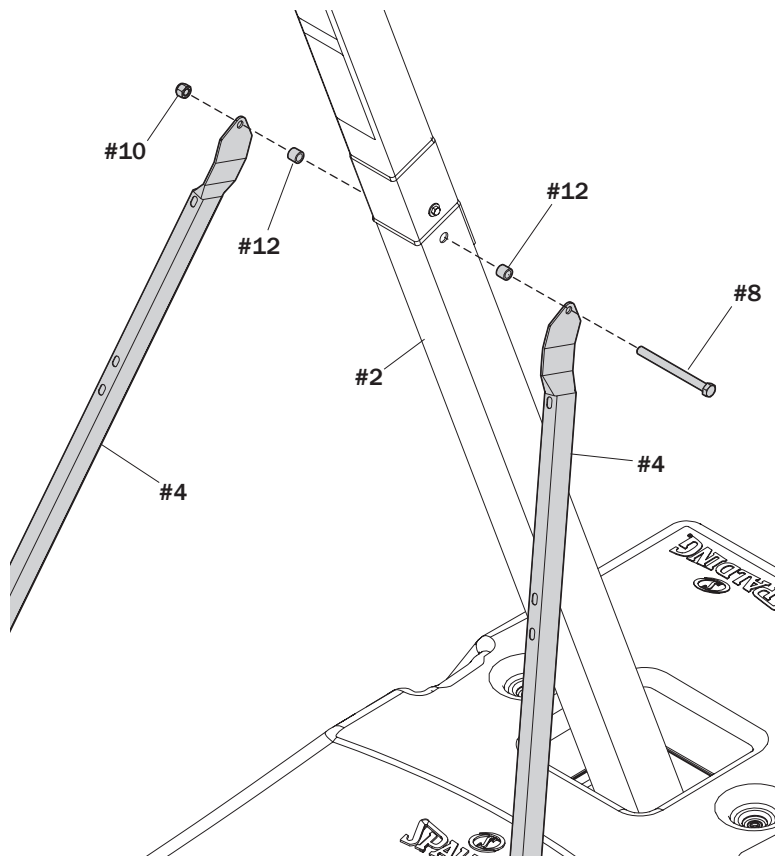


B **INSTALL THE POLE ONTO THE BASE**

5. Rotate the non-secured ends of the base struts (4) to align with the mounting holes in the base.
6. Secure the ends of the base struts (4) to the base frame using bolts (9) and lock washers (14).

⚠ IMPORTANT ⚠

TIGHTEN ALL COMPONENTS COMPLETELY.

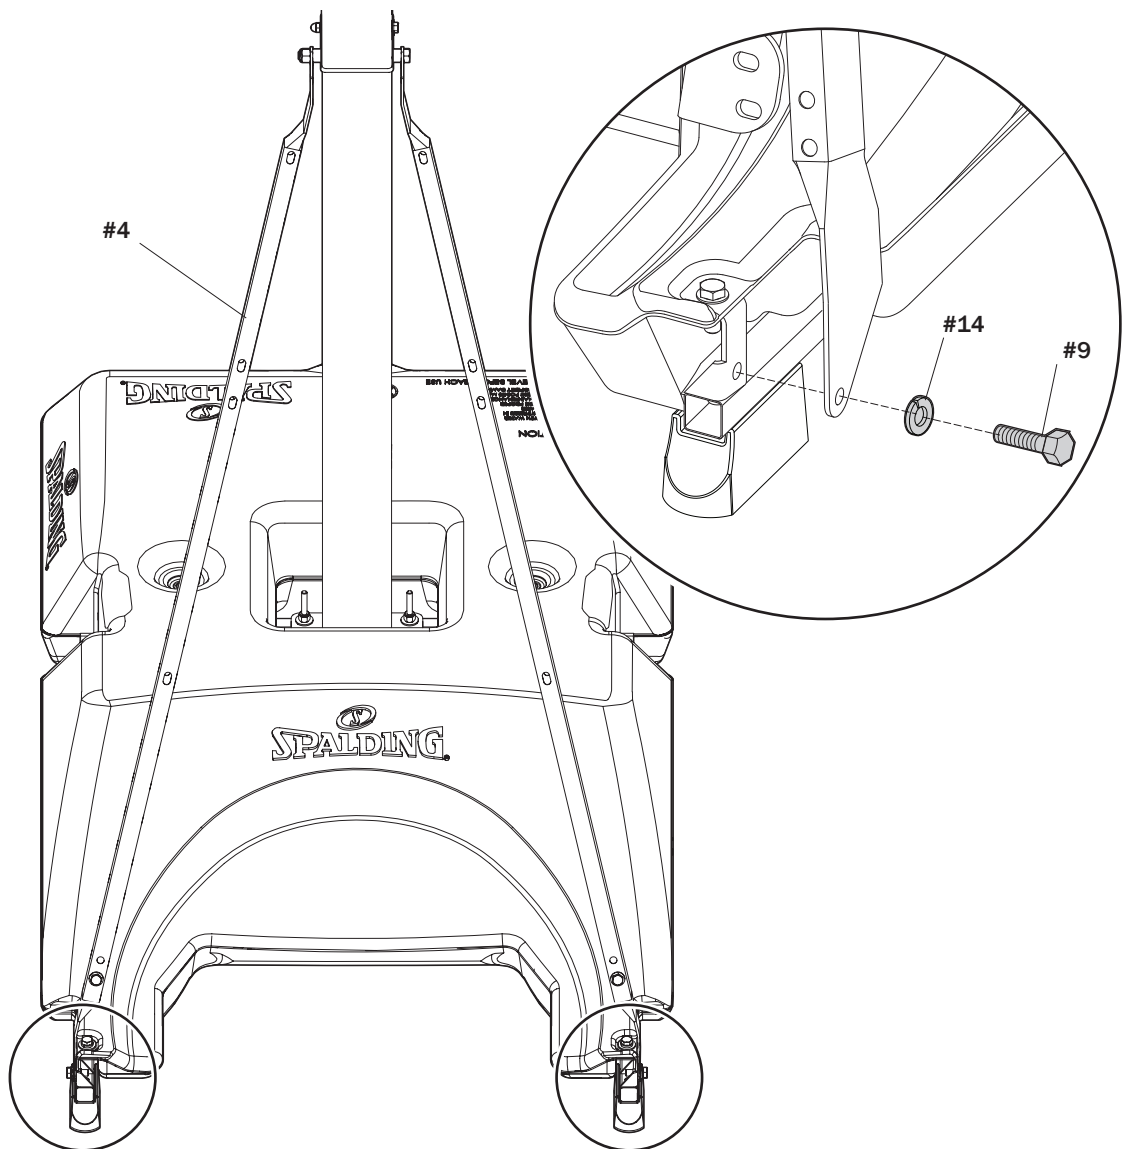


Assemble the Wheel Carriage

Required Parts:

- Kit 3
- Scrap Wood Board
- 9/16" Socket Wrench or Wrench
- Mallet

Completed Wheel Carriage Assembly:

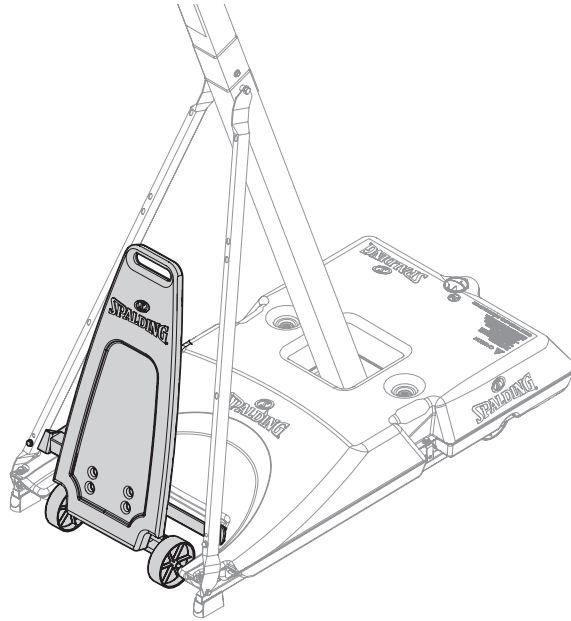


C PREPARE THE BASE FOR THE WHEELS

1. Attach the u-bracket (17) to the cross member (21) using the bolts (25), washers (33), and nuts (30).




IMPORTANT

NOTE THE ORIENTATION OF THE BRACKET.

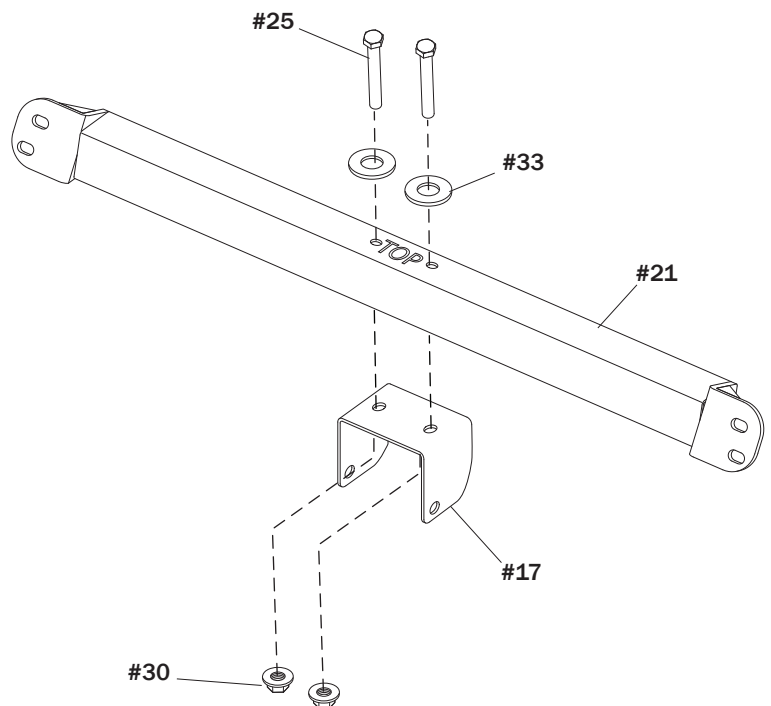


C PREPARE THE BASE FOR THE WHEELS

2. Secure the cross member (21) using only the bottom set of holes to the front struts (4) using the bolts (26), washer (33), and nuts (30).

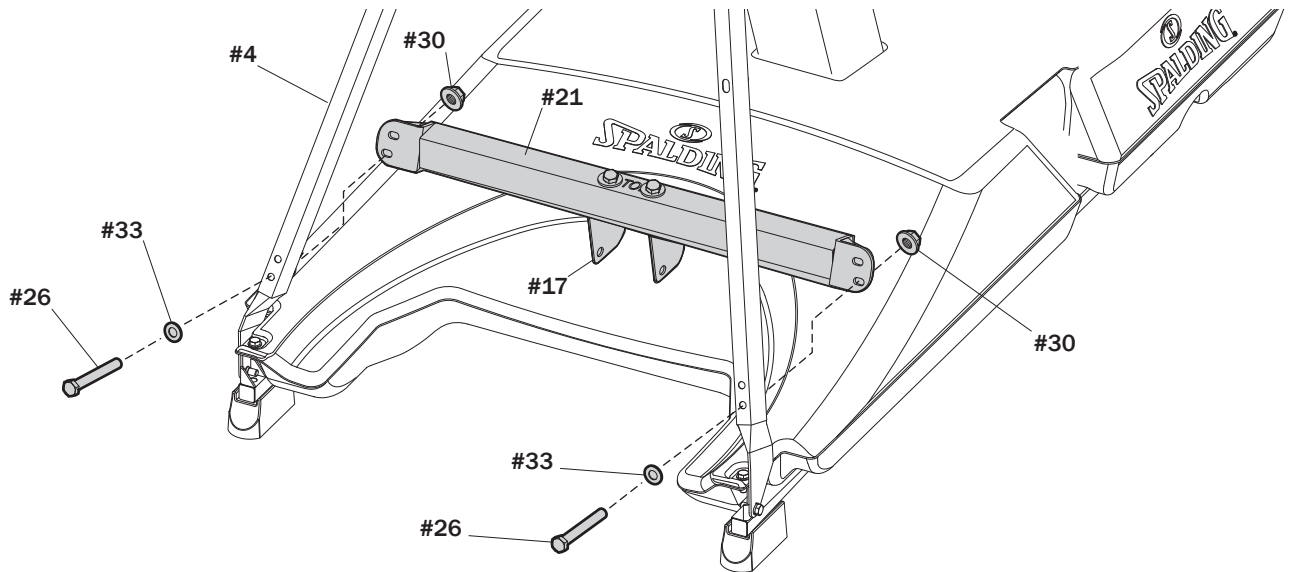

D ASSEMBLE THE WHEELS

1. Insert the axle (22) through the wheel bracket (18).
2. Secure the wheels (15) to the axle (22) using the axle nuts (31).
3. Tap the axle nuts (31) onto the axle with a hammer or mallet.

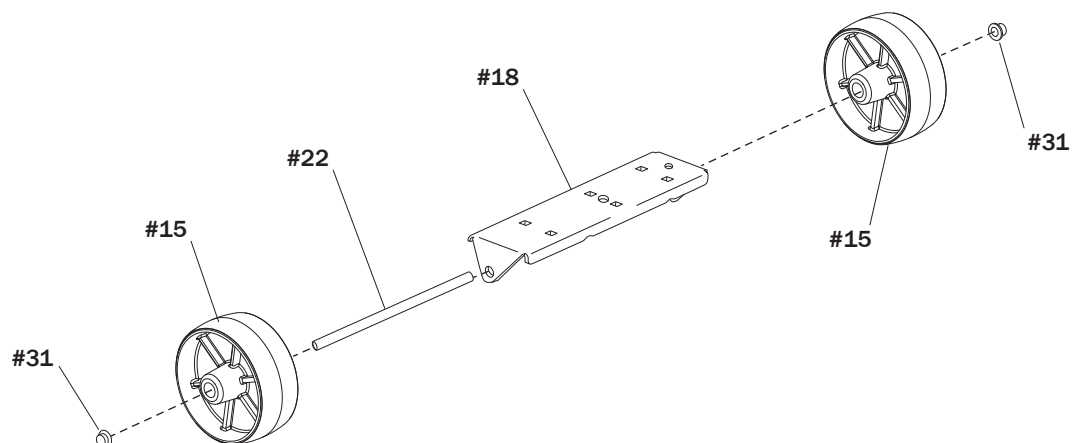


D ASSEMBLE THE WHEELS

4. Secure the hinge tubes (23) to the wheel bracket (18) using the bolts (28) and nuts (30).


⚠ IMPORTANT ⚠

NOTE THE ORIENTATION OF THE HINGE TUBES (23). THE SHORT ENDS GO UNDER THE WHEEL BRACKET (18). DO NOT OVERTIGHTEN.

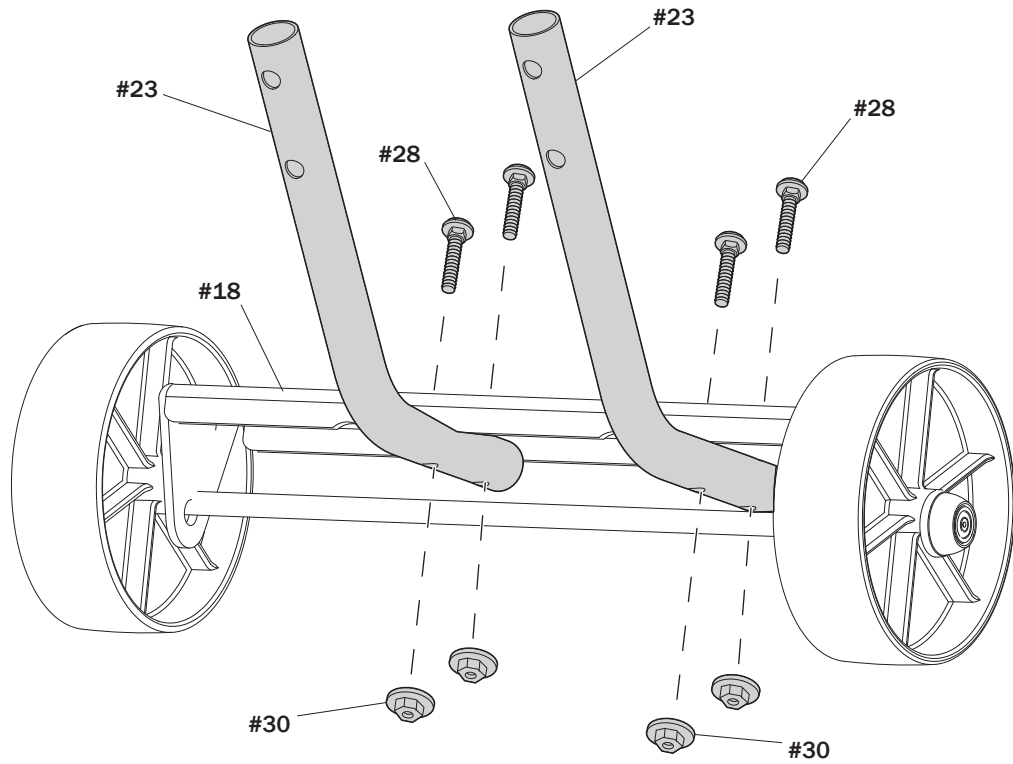

E**INSTALL THE WHEEL ASSEMBLY**


1. Secure the lower pivot bracket (19) to the wheel assembly using the bolt (24), pivot disk (20), and nut (11).
2. Secure the wheel assembly to the u-bracket (17) using the bolt (27), spacer (32), and nut (11).

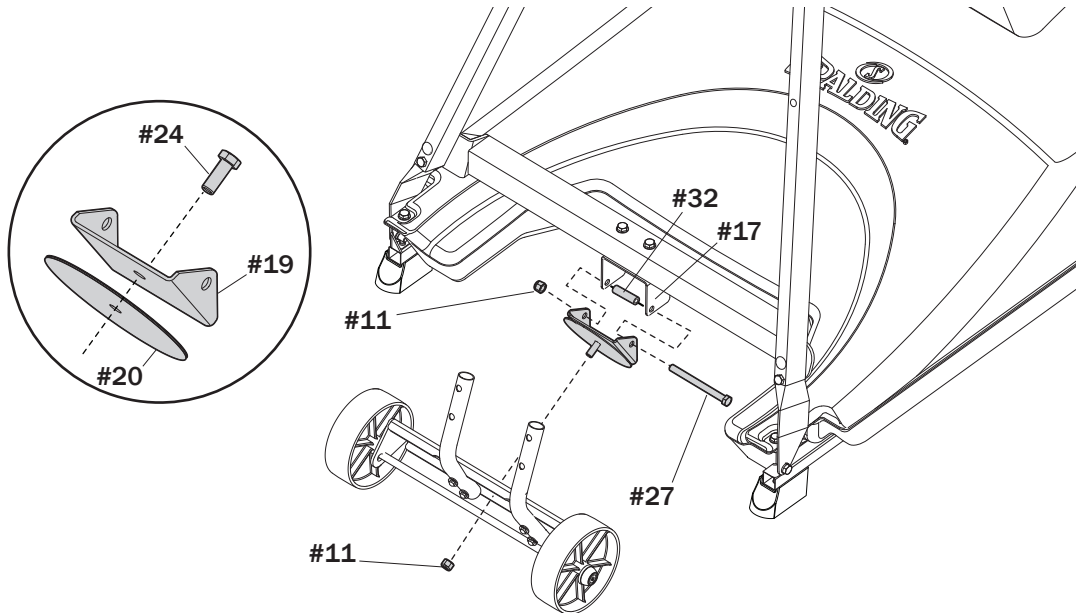

3. Attach the transport handle (16) to the wheel assembly using the carriage bolts (28) and nuts (30).

⚠ IMPORTANT ⚠

Tighten all components completely.

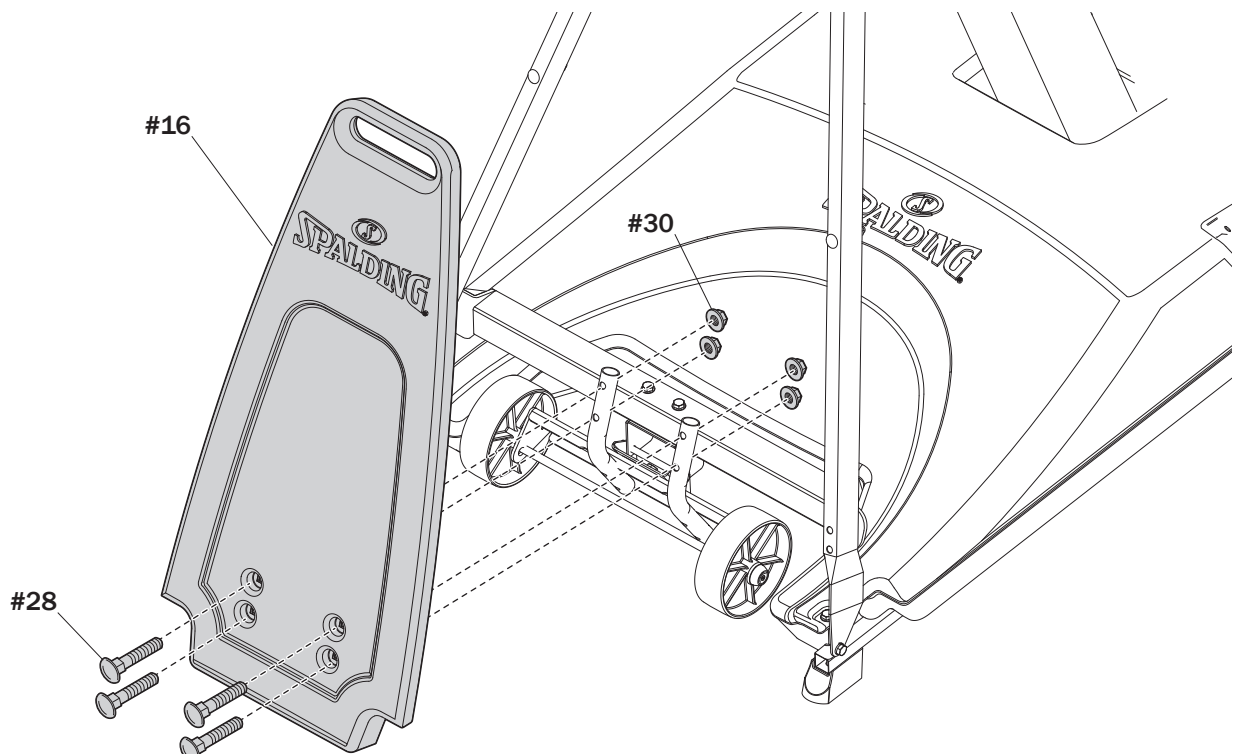


Elevator Assembly

Required Parts:



- Kit 4
- 1/2" Socket Wrench or Wrench

Completed Elevator Assembly:

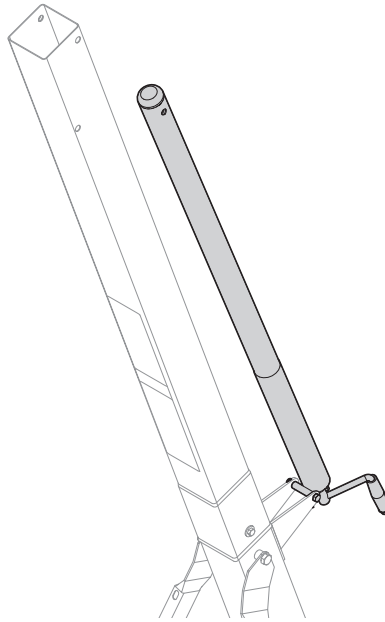


F INSTALL THE ELEVATOR ASSEMBLY

1. Securely rest the assembly on a sawhorse.
2. Slide the screw-jack sleeve (36) over the screw jack and attach the cap (37) to the top end.

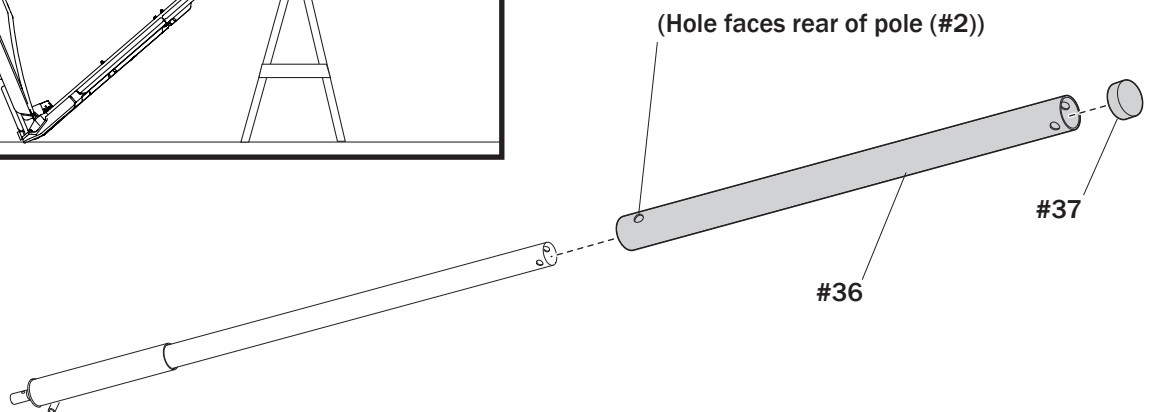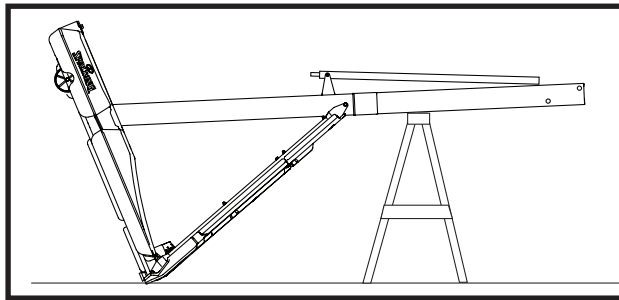


F **INSTALL THE ELEVATOR ASSEMBLY**

3. Attach the screw-jack to the pole bracket with the bolt (39) and nut (40).

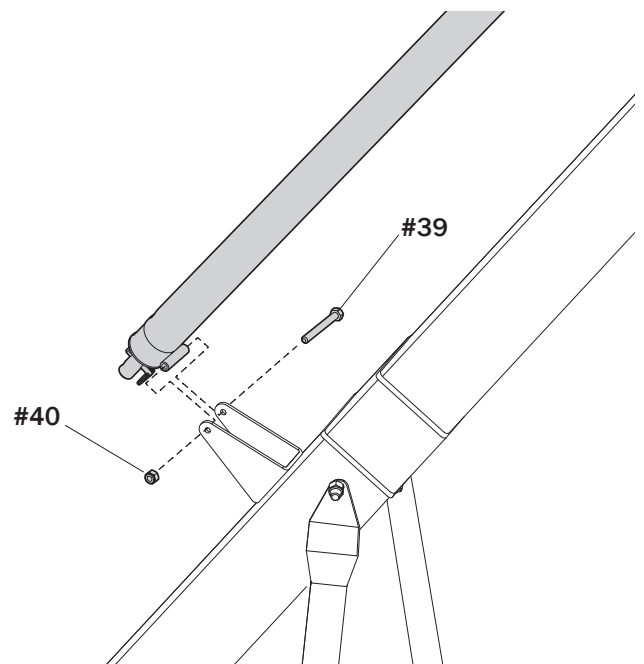

4. Attach the handle (34) to the screw jack with the pin (38).

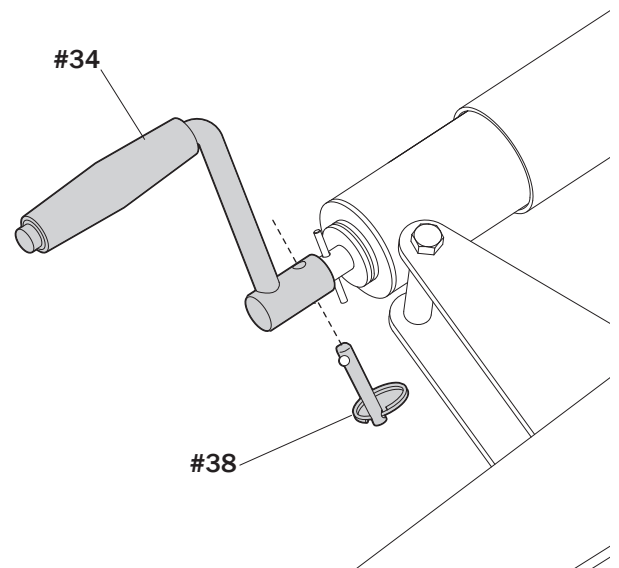


Assemble the Upper Elevator

Required Parts:

- Kit 5
- 3/4" Socket Wrench or Wrench
- Sawhorse

Completed Backboard Assembly:



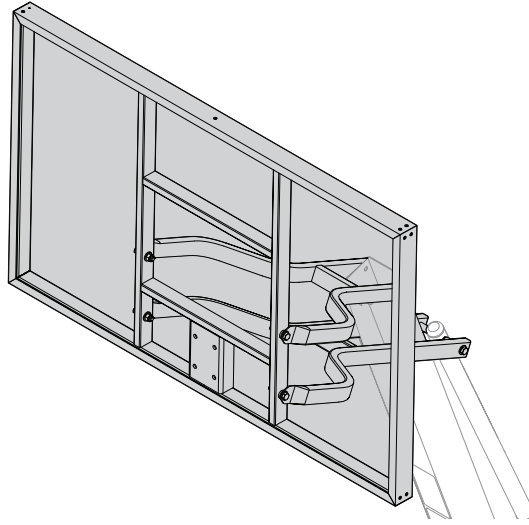


⚠ WARNING ⚠

TWO PEOPLE ARE REQUIRED FOR THIS PROCEDURE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

G ATTACH THE ELEVATOR TUBE ASSEMBLY

1. Securely rest the assembly on a sawhorse. Identify the upper (41) and lower (42) elevator tubes.

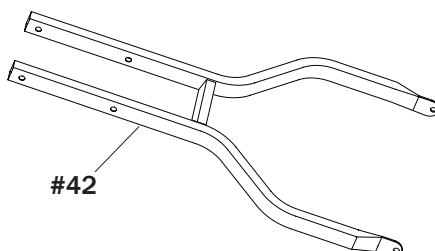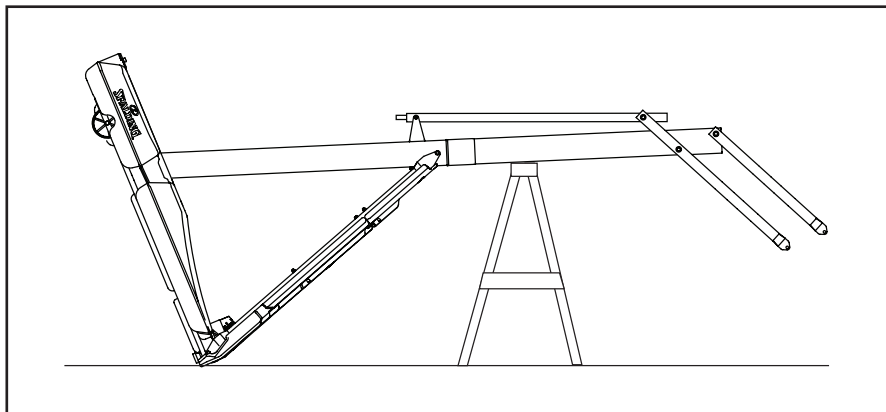

G**ATTACH THE ELEVATOR TUBE ASSEMBLY**


2. While the system is securely resting on the sawhorse, install the elevator tubes (41 and 42) to the top pole section (3) using the bolts (46), washers (50), spacers (49), and nuts (10).
3. Install the pole cover (45).

⚠ WARNING ⚠

TIGHTEN THE BOLTS (46) IN THE LOCK NUTS (10) UNTIL FLUSH (EVEN) WITH THE LOCK NUT'S OUTER EDGE.

NOTE

TEST-FIT THE LARGE BOLTS INTO THE LARGE HOLES OF THE ELEVATOR TUBES AND BACKBOARD BRACKETS. CAREFULLY ROCK THEM IN A CIRCULAR MOTION TO REAM OUT ANY EXCESS PAINT FROM HOLES, IF NECESSARY.

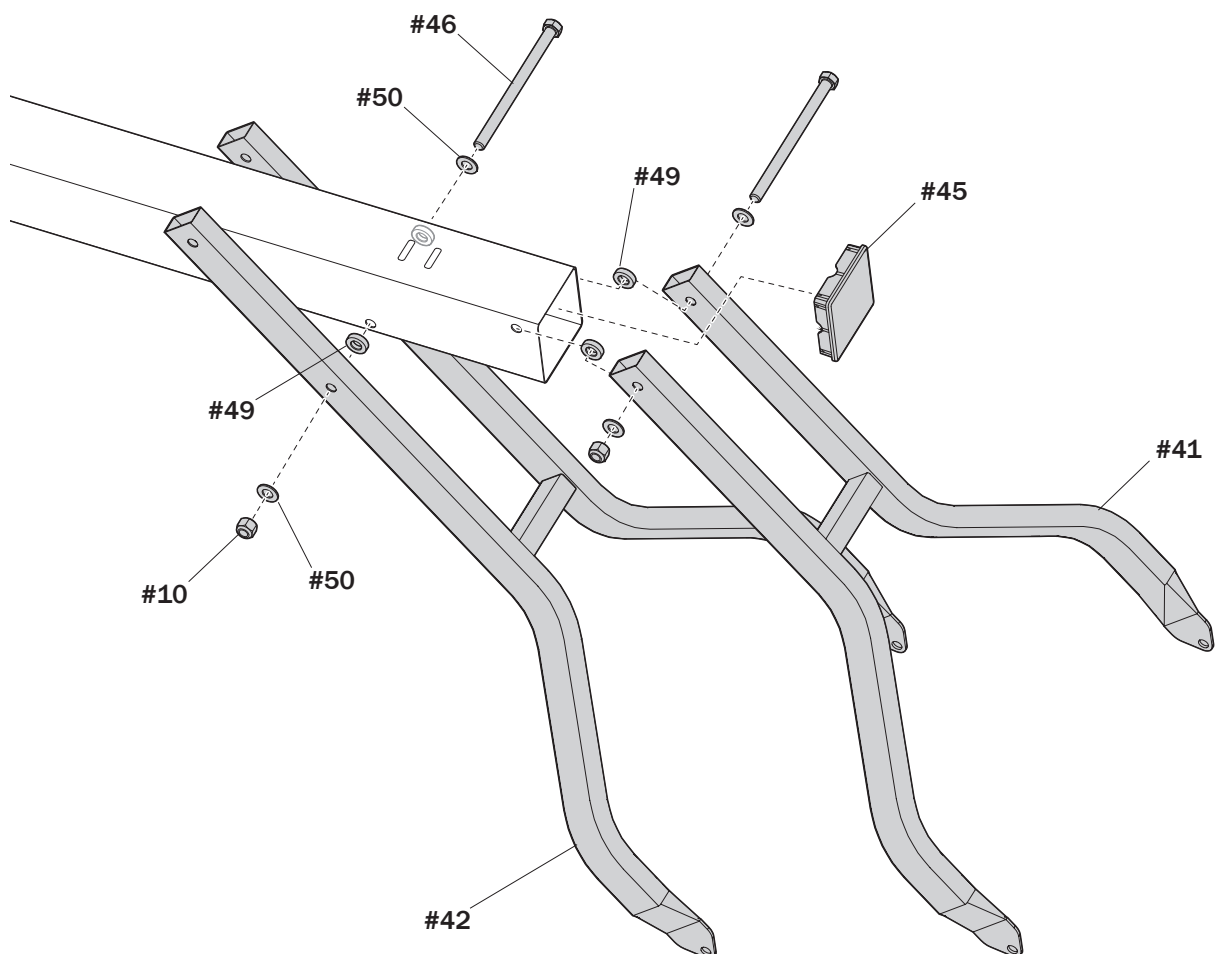


G ATTACH THE ELEVATOR TUBE ASSEMBLY

4. While the system is securely resting on the sawhorse, align the inner metal screw jack (35) bolt holes with the outer plastic screw jack sleeve (36) bolt holes.
5. Install the screw jack assembly to the lower elevator tube (42) using the bolt (46), washers (50), spacers (51), and nut (10).
6. Reinstall the screw jack cap (37).




WARNING

TIGHTEN THE BOLT (46) IN THE LOCK NUT (10) UNTIL FLUSH (EVEN) WITH THE LOCK NUT'S OUTER EDGE.

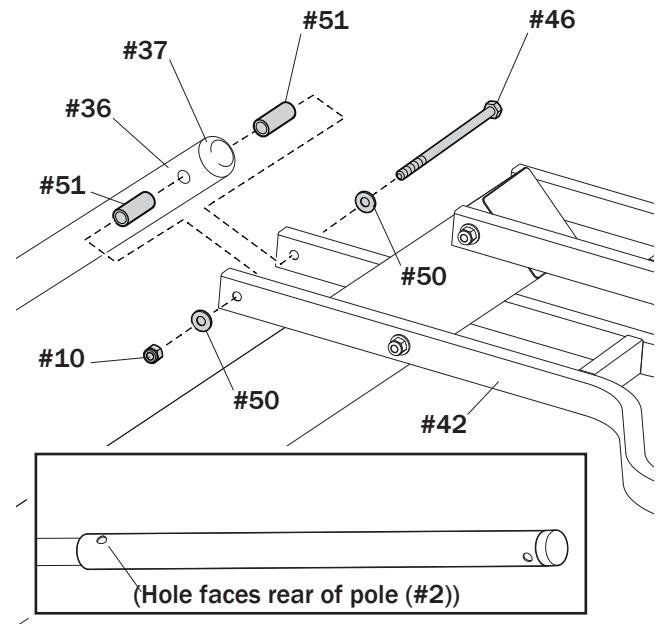


H ATTACH THE BACKBOARD

1. Place the foam pad (55) on a flat surface with the adhesive side facing up and remove protective film.
2. Align each of the steel spacers (54) with the four holes in the foam pad (55) and press the spacers firmly onto the adhesive of the foam pad.
3. Align the steel spacers on the foam pad assembly into the mounting holes on the backboard and firmly press into position.

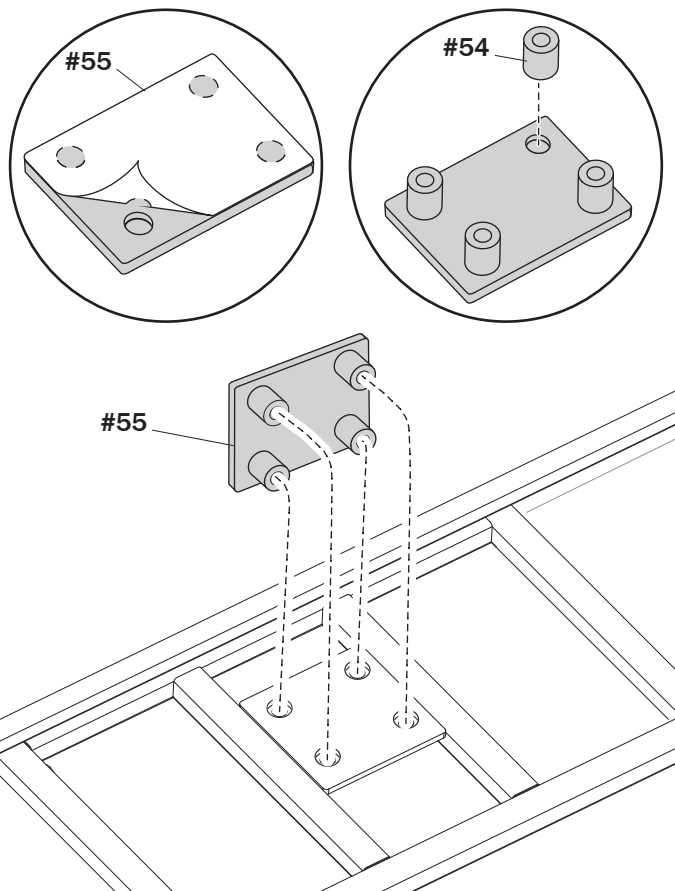


H**ATTACH THE BACKBOARD**

4. Fill the base halfway with water (approx. 25 gallons (95 Liters) or sand (approx. 295 lbs. (134 kg)).
5. Insert the cap (44) into the base (1) to close.
6. Lower the backboard to the lowest setting and roll the completed assembly to the desired location.

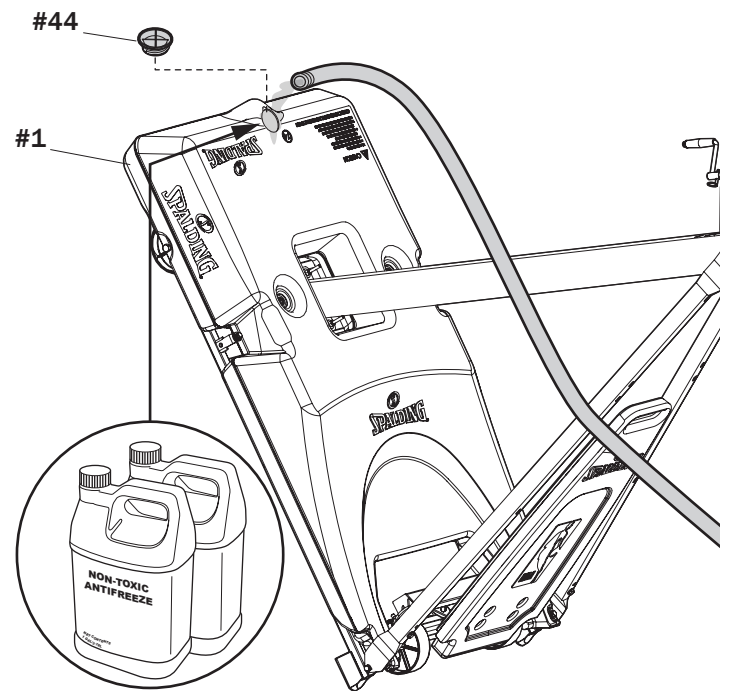

7. After system is placed in an upright position, complete the filling process in the base.
8. Fill the base completely with water (approx. 49 gallons (186 liters)) or sand (590 lbs. (268 kg)).
9. Rotate the cap (44) securely into both the top and bottom bases.

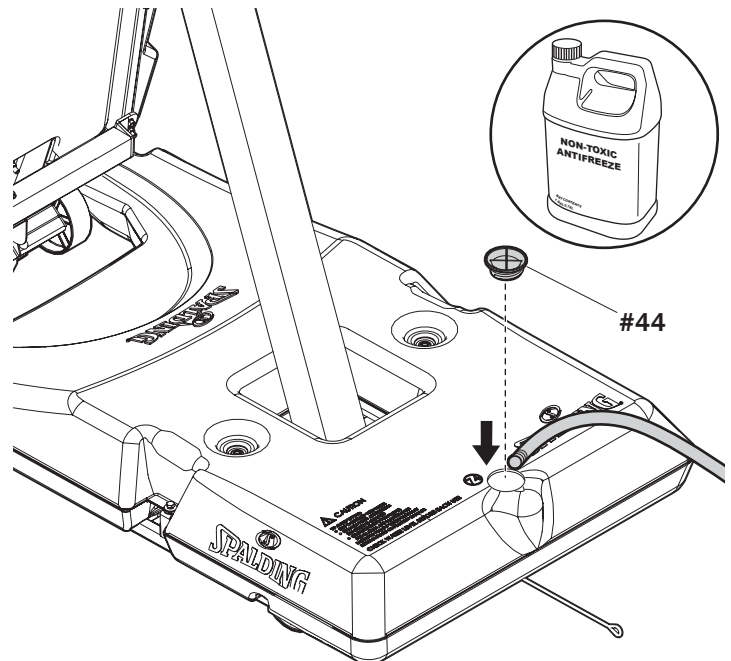**⚠ CAUTION ⚠**

ADD AT LEAST TWO GALLONS (7.6 LITERS) OF NON-TOXIC ANTIFREEZE TO THE WATER OF THE BOTTOM BASE IN SUB-FREEZING CLIMATES. CHECK THE WATER LEVEL BEFORE EACH USE!

NOTE

IF USING SAND: 2 GALLONS OF ANTIFREEZE IS NOT REQUIRED.


H

ATTACH THE BACKBOARD

- 10.** Attach the backboard (44) to the elevator tubes (41 and 42) using the bolts (47), washers (50), bushings (49), and nuts (10).

WARNING

TIGHTEN THE BOLT (47) IN THE LOCK NUT (10) UNTIL FLUSH (EVEN) WITH THE LOCK NUT'S OUTER EDGE.

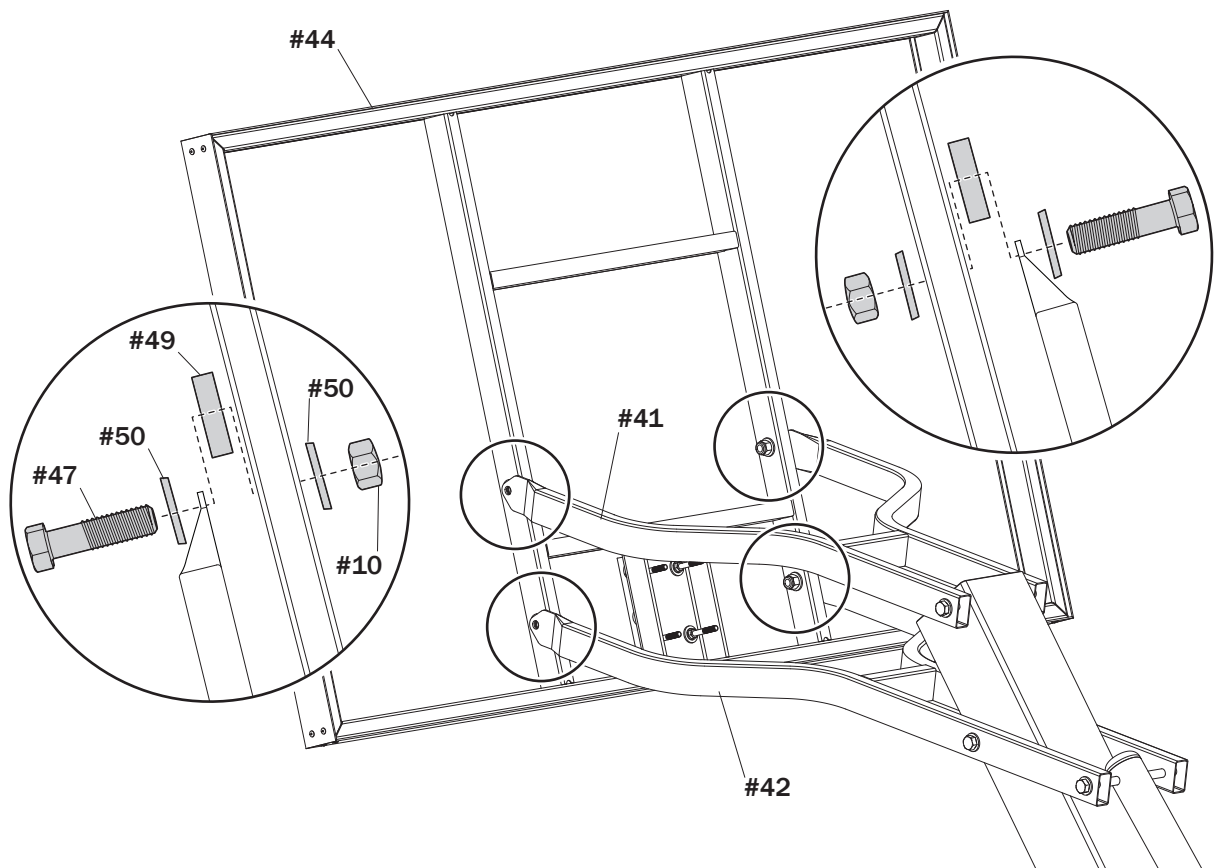


Assemble the Goal

Required Parts:

- Kit 6
- Kit 7
- 1/2", 3/4" Socket Wrench or Wrench
- Socket Wrench Extension
- Phillips Screwdriver #3


Completed Goal Assembly:

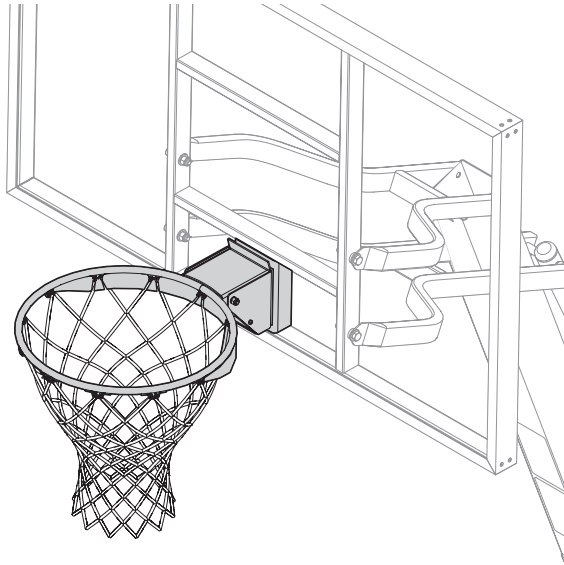

I

ASSEMBLE THE GOAL


1. Insert the t-bolt (59) through the slam jam bracket (61).
2. Adjust the backboard to the lowest setting and secure the slam jam bracket (61) to the backboard through the foam pad (55) using the bolts (56), washers (13), and nuts (58).

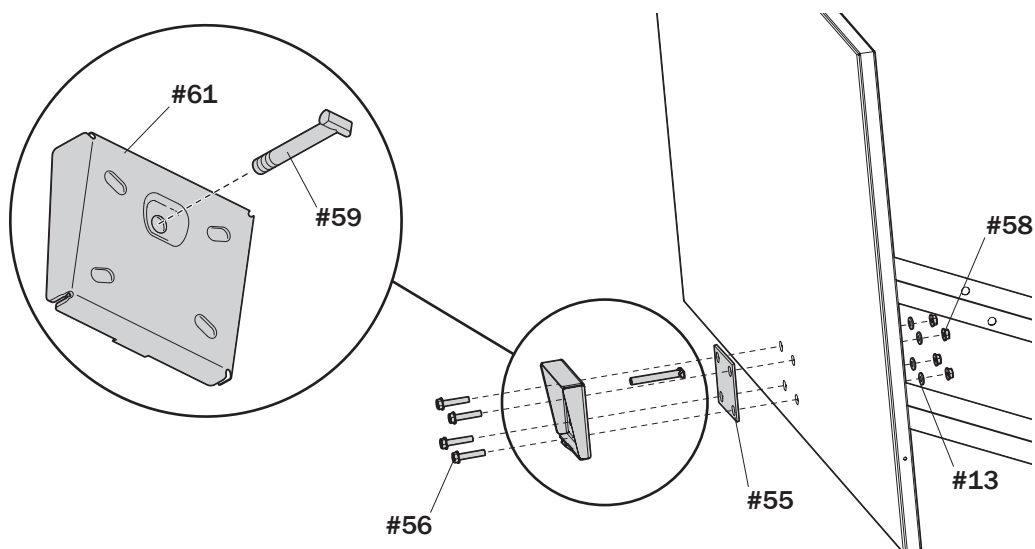


I

ASSEMBLE THE GOAL

3. Remove the screws (60) that secure the rim cover (62).

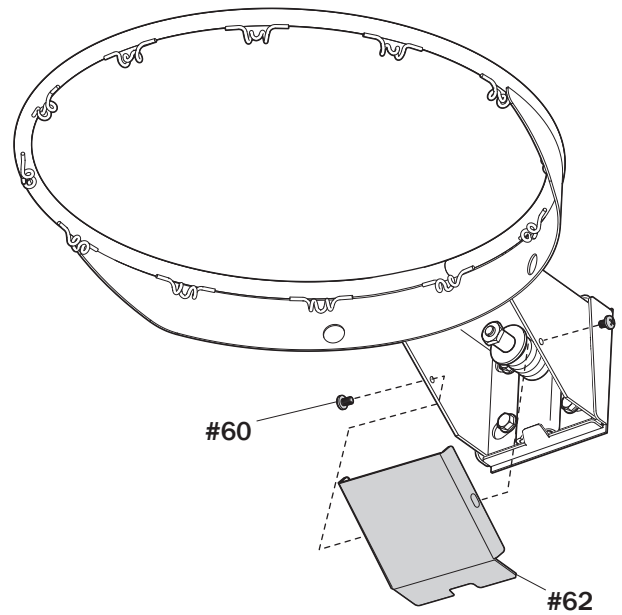


4. Insert the rim assembly (52) into the slam jam bracket (61) and allow the t-bolt (59) to pass through the rim.
5. Insert the spring bracket (63), spring (64) and washer (65) onto the t-bolt (59).
6. Thread the hex nut (66) onto the t-bolt (59).

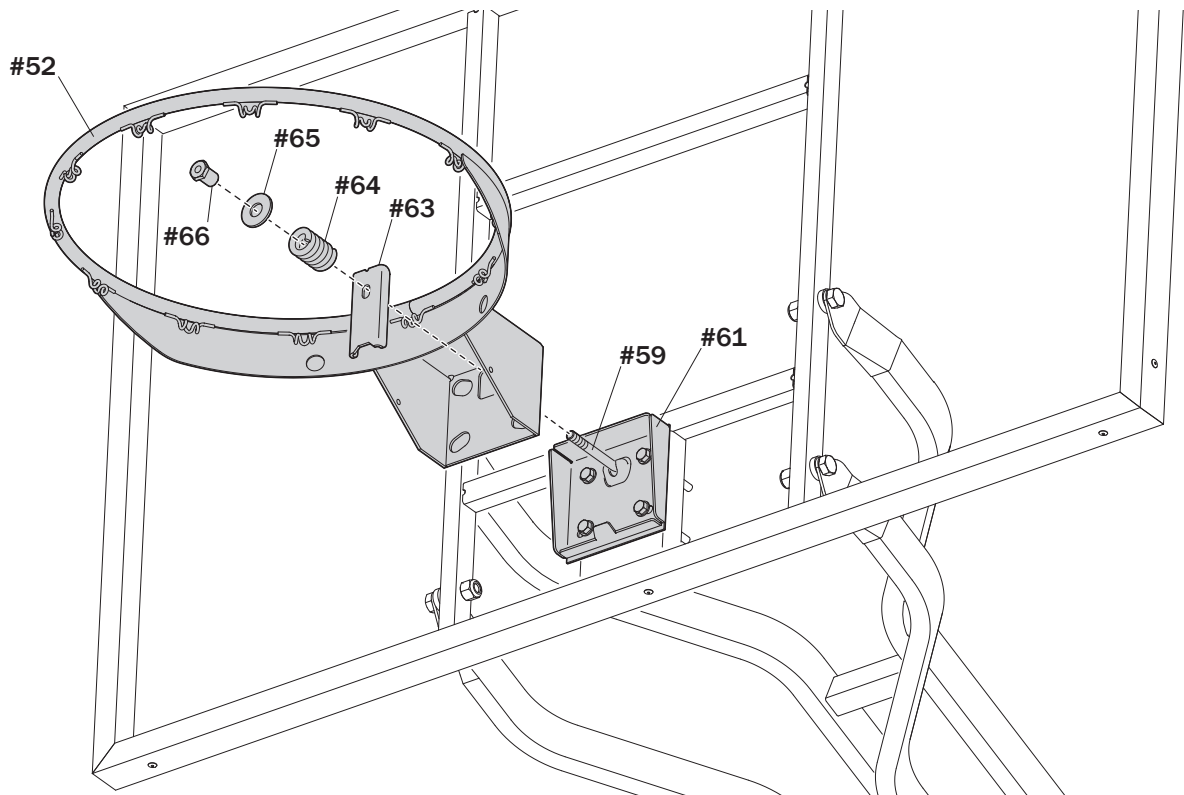

I

ASSEMBLE THE GOAL


7. Tighten the nut (66) until 1/8" of the bolt threads onto the exposed end of the t-bolt (59).

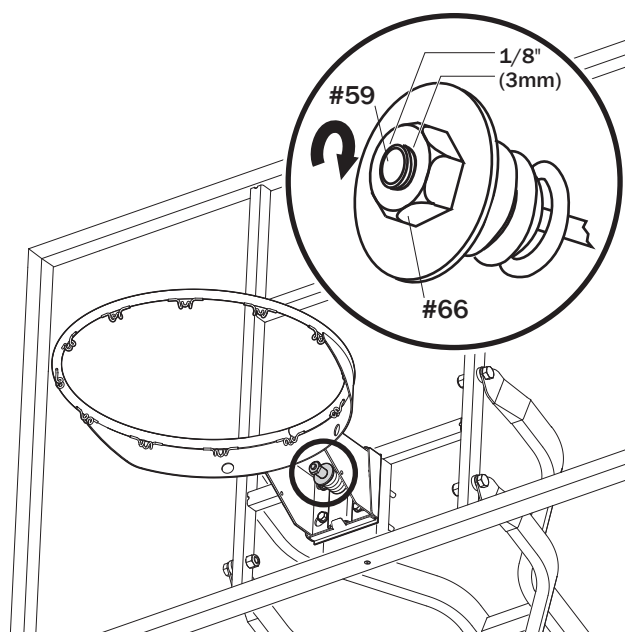

NOTE

If desired, tighten the nut to increase the rim's resistance to movement.


8. Reinstall the rim cover (62) using the cover screws (60).

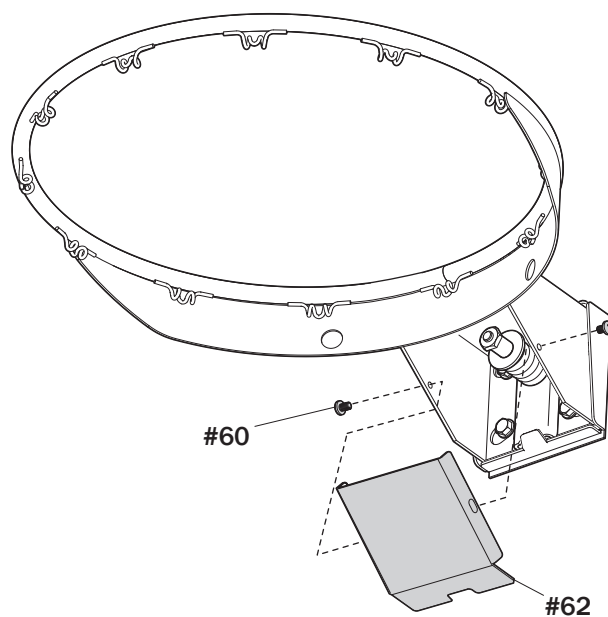

I

ASSEMBLE THE GOAL


9. Thread the net (53) onto the rim (52).

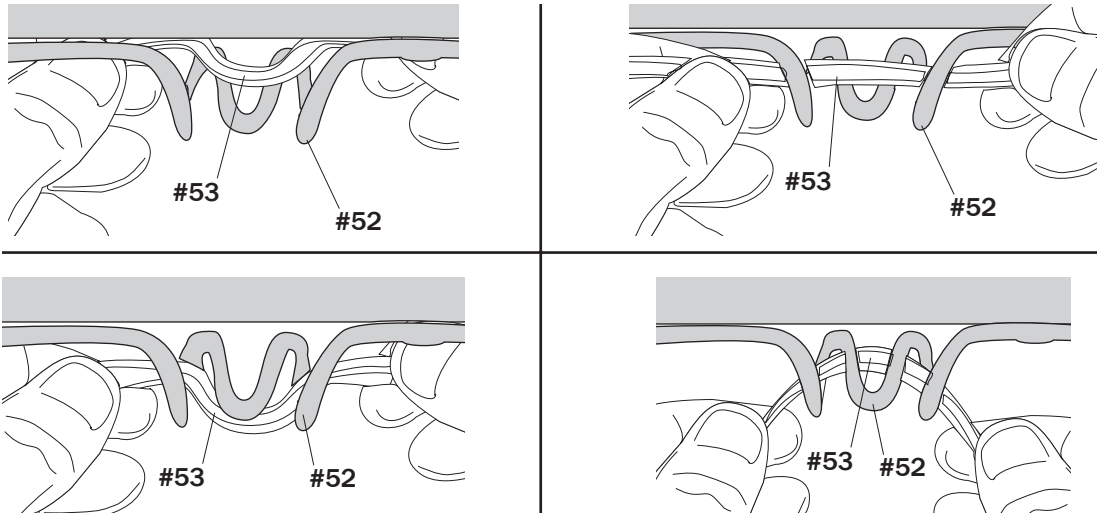

J

APPLY THE LABELS


1. Apply the Height Adjustment and Moving Label (57) to the front of the pole, where it is clearly visible.

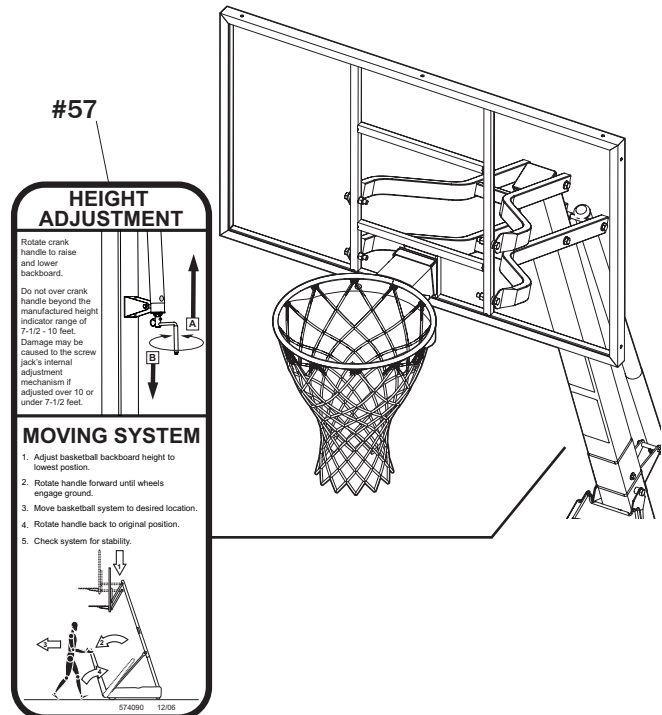

J

APPLY THE LABELS

2. Apply the Height Indicator Labels (48) to the screw jack.
3. Adjust the height to 7-1/2 feet (2.3 m) from the top of the rim to the playing surface.
4. Place 7-1/2 feet (2.3 m) sticker to the middle of the hole of the screw jack sleeve.
5. Repeat for each subsequent height until the last sticker is in place at the 10 foot (3.05 m) height.

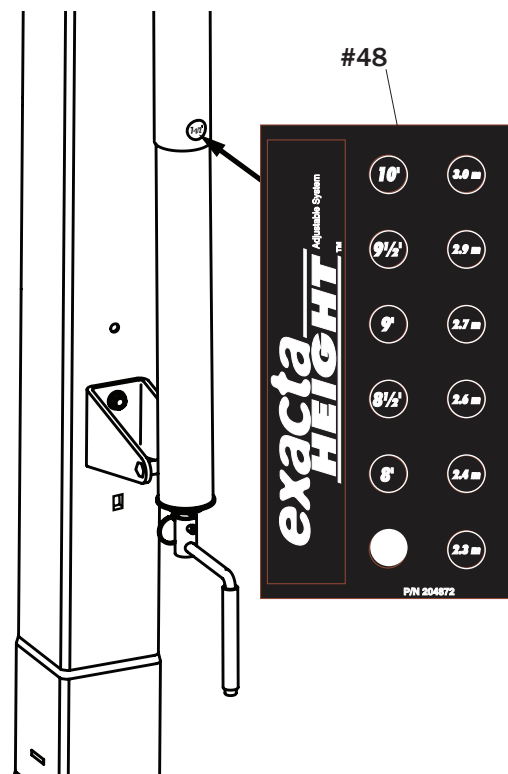


6. Rotate the crank handle to move the backboard up or down to the desired height.

⚠ WARNING ⚠

DO NOT ALLOW CHILDREN TO ADJUST THE HEIGHT.

DO NOT OVER CRANK THE HANDLE BEYOND THE HEIGHT INDICATOR RANGE OF 7-1/2 TO 10 FEET OR THE ADJUSTMENT MECHANISM MAY BE DAMAGED.

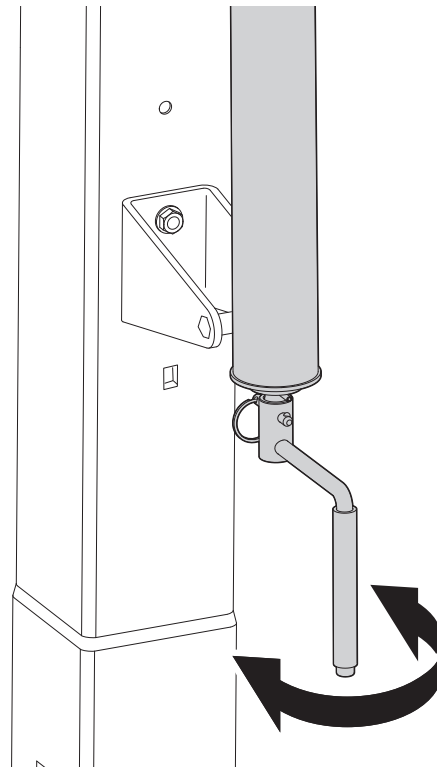


Install The Stadium Pad

Required Parts:


Complete Unit Assembly:

- Kit 8
- 9/16" Socket Wrench or Wrench

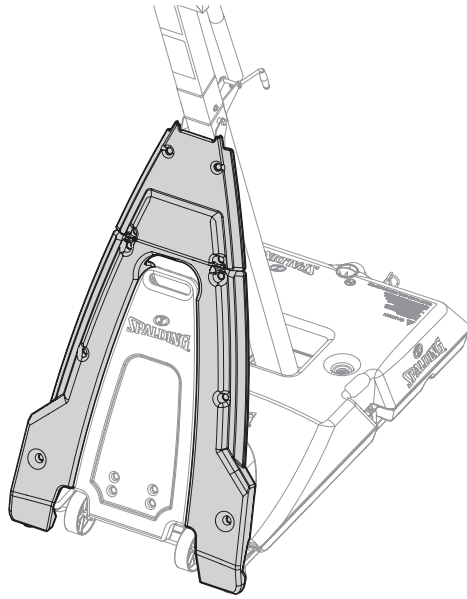


K INSTALL THE STADIUM PAD

1. Attach the top stadium pad (68) to the front strut (4) using the bolts (29) and nuts (30).

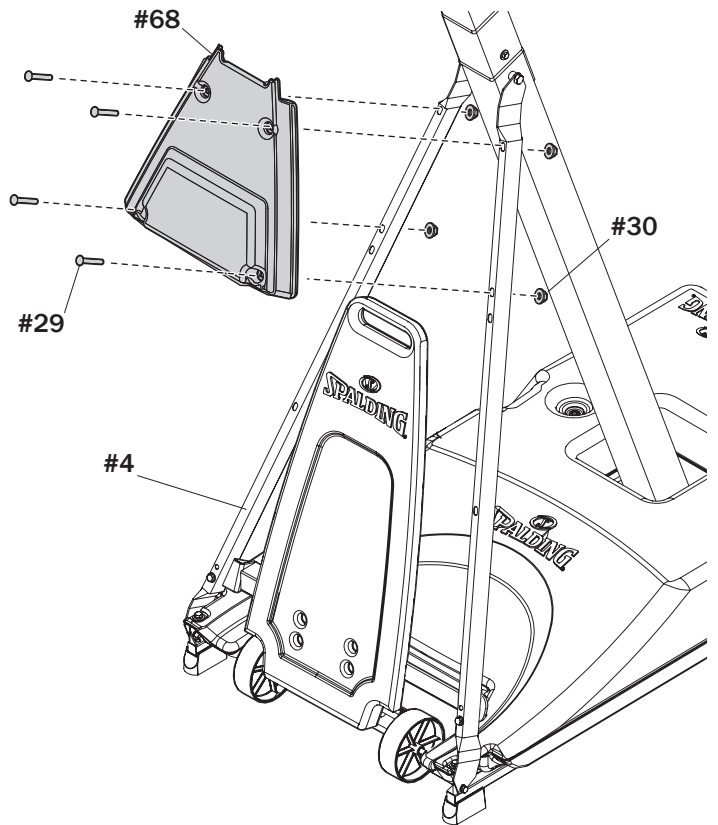

K **INSTALL THE STADIUM PAD**

2. Slide the bottom stadium pad (67) behind the transport handle (16) and secure using the bolts (29) and nuts (30).

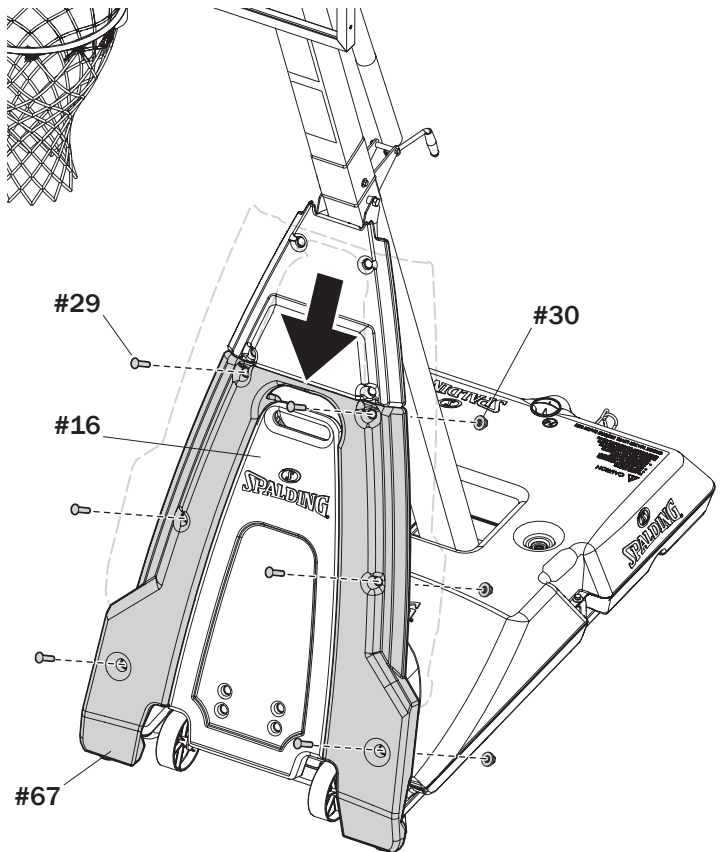


Secure The Assembled Unit for Use

Required Parts:

- Water
- Sand

Complete Unit Assembly:

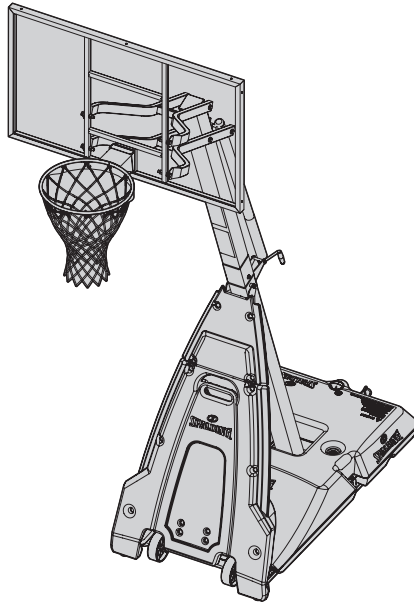


WARNING

- TWO CAPABLE ADULTS ARE REQUIRED FOR THIS PROCEDURE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY.
- DO NOT LEAVE THE ASSEMBLY UNATTENDED WHEN EMPTY; IT MAY TIP OVER.
- FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.
- THE CAP (33) MUST BE TIGHTENED COMPLETELY AND SECURELY TO PREVENT LEAKAGE.
- CONTACT CUSTOMER SERVICE IMMEDIATELY IF THE CAP IS MISSING OR DAMAGED.
- CHECK THE WATER LEVEL BEFORE EACH USE.

L**SECURE THE GROUND STAKE**

1. Place the system in the desired location.
2. Stretch the rope tight to determine the ground stake (69) location.
3. Install the ground stake (69) into the ground.
4. Loop the eyelet of the rope onto the eyelet of the ground stake (69).

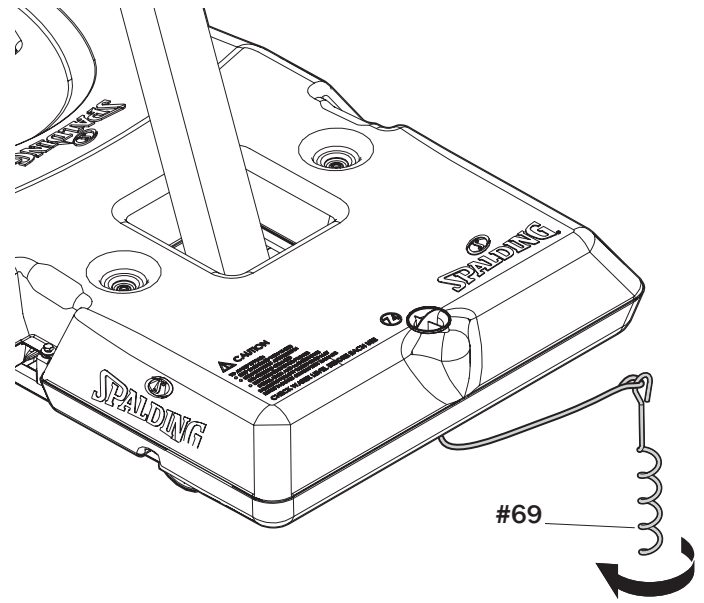


Operation

M ADJUSTING THE HEIGHT

1. Rotate the crank handle to move the backboard up or down to the desired height.


⚠ WARNING ⚠

DO NOT ALLOW CHILDREN TO ADJUST THE HEIGHT.
DO NOT OVER CRANK THE HANDLE BEYOND THE HEIGHT INDICATOR RANGE OF 7-1/2 TO 10 FEET OR THE ADJUSTMENT MECHANISM MAY BE DAMAGED.

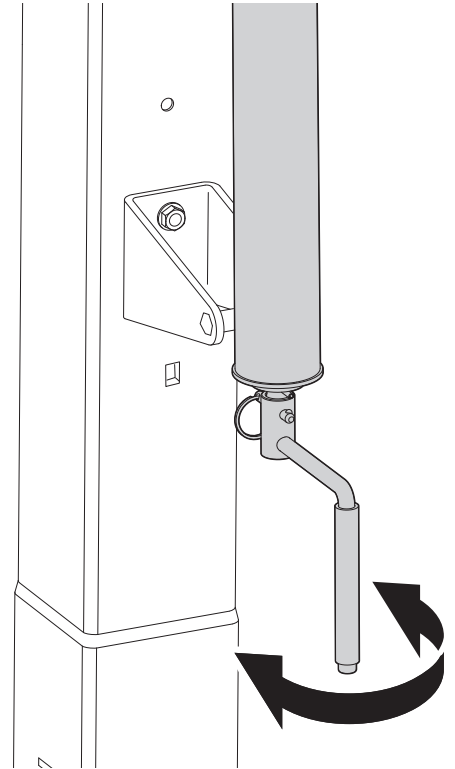


N MOVING THE UNIT

1. Adjust the basketball backboard height to the lowest position.
2. Rotate the handle forward until the wheels engage the ground.
3. Move the basketball system to the desired location.
4. Rotate the handle back to its original position.
5. Check the system for stability.

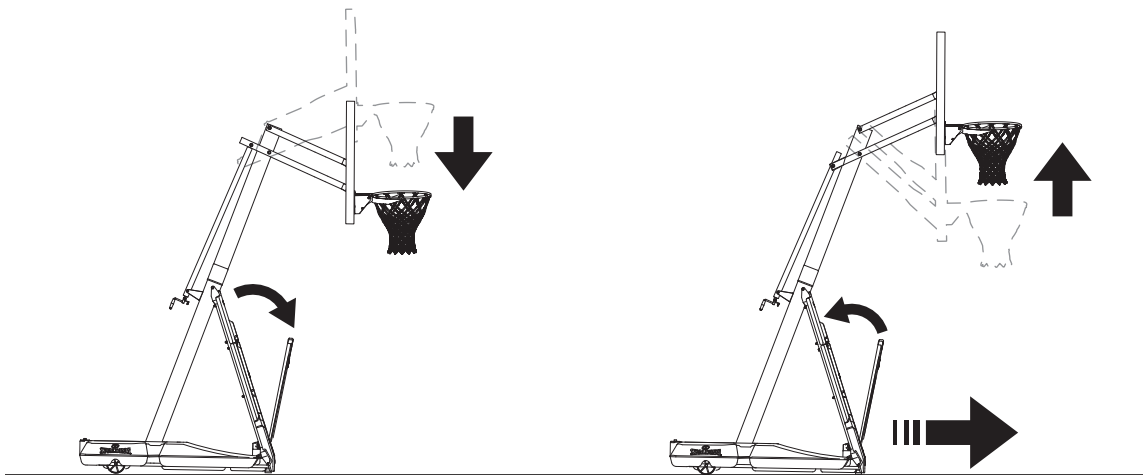

Parts List

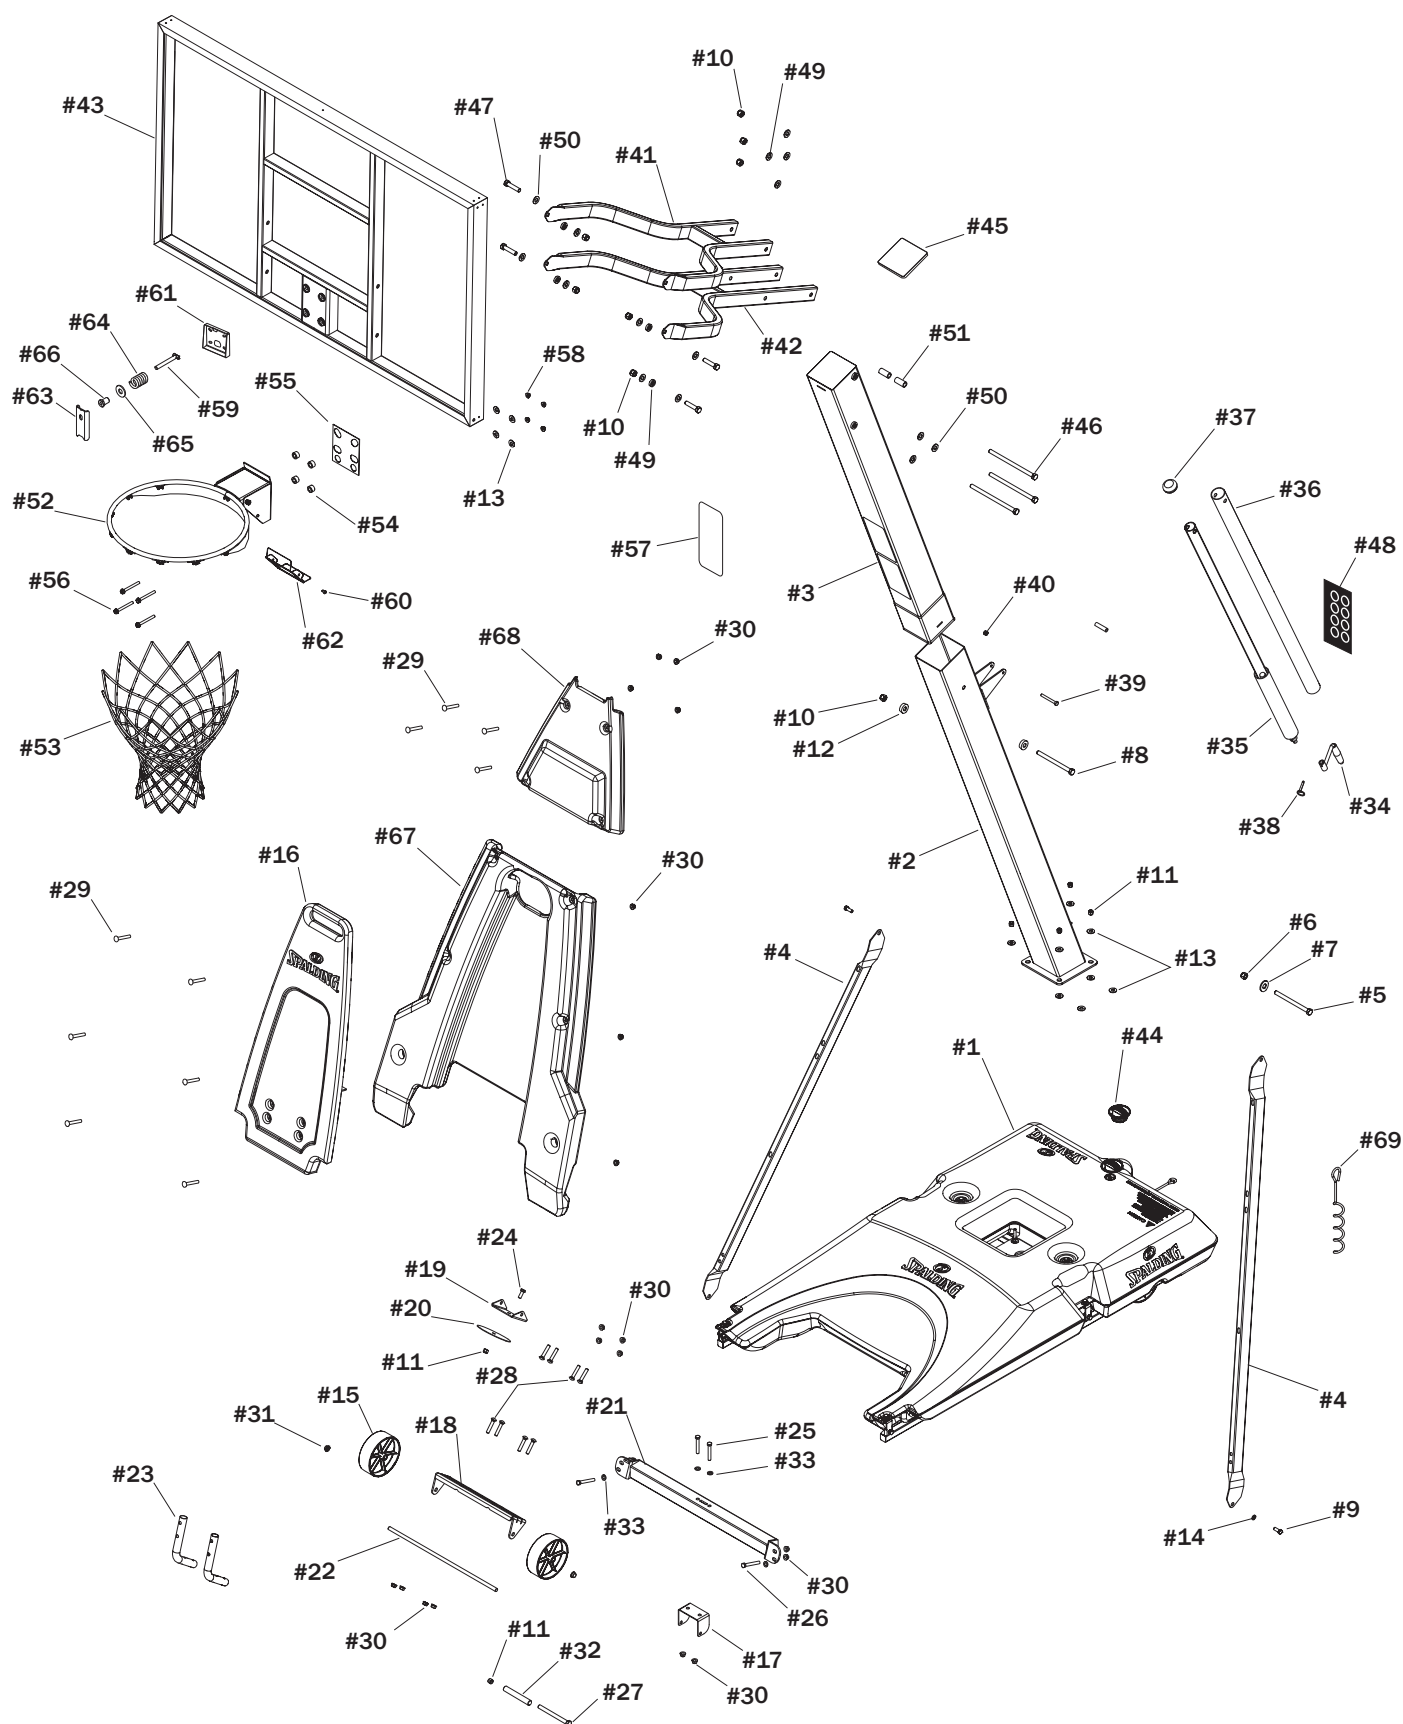

Parts List

Item	Qty	Part No.	Description
1	1	700376	Base
2	1	901329	Bottom Pole Section
3	1	901330	Top Pole Section
4	2	908459	Strut, Front
5	1	202662	Bolt, Hex Head, 5/16-18 x 4.5" Long
6	1	207610	Nut, Acorn, 5/16-18
7	2	203218	Washer, Flat, 5/16
8	1	265525	Bolt, Hex Head, 1/2-13 x 6" Long
9	2	265523	Bolt, Hex Head, 3/8-16 x 1" Long
10	8	206340	Lock-nut, Nylon Insert, 1/2-13
11	6	203063	Lock-nut, Nylon Insert, 3/8-16
12	2	201642	Plastic Spacer, 0.53" ID x 0.63" Long, Black
13	12	203309	Washer, Flat, 3/8
14	2	202602	Lock-washer, 3/8
15	2	600074	Wheel, 6"
16	1	60007901	Transport Handle, Plastic
17	1	800373	U-Bracket, Pivot
18	1	908466	Bracket, Wheel
19	1	206948	Bracket, Pivot, Lower
20	1	206956	Disk, Pivot, Plastic
21	1	908513	Cross Member
22	1	20694001	Axle, Rod, 20.5" L
23	2	908460	Tube, Hinge
24	1	206252	Bolt, Hex Head, 3/8-16 x 1" Long
25	2	265563	Bolt, Hex Head, 3/8-16 x 2.5" Long
26	2	200514	Bolt, Hex Head, 3/8-16 x 3" Long
27	1	203330	Bolt, Hex Head, 3/8-16 x 4.5" Long

Item	Qty	Part No.	Description
28	8	203277	Bolt, Carriage, 3/8-16 x 2" Long
29	10	206011	Bolt, Carriage, 3/8-16 x 2.75" Long
30	22	203041	Nut, Hex-Flange, 3/8-16
31	2	207550	Axle Nut
32	1	202274	Spacer, 0.379 I.D. x 3.5" Long
33	4	203299	Washer, Flat, 3/8
34	1	700009	Handle, Screw-Jack
35	1	80034403	Screw Jack
36	1	60016401	Sleeve, Screw Jack
37	1	600165	Cap, Screw Jack
38	1	202528	Pin, Handle
39	1	201518	Bolt, Hex-Head, 5/16-18 x 2.75" Long
40	1	203099	Lock-Nut, Nylon Insert, 5/16-18
41	1	901332	Elevator Tube, Upper
42	1	901331	Elevator Tube, Lower
43	1		Backboard
44	1	266300	Base Cap
45	1	600052	Pole Cap
46	3	250010	Bolt, Hex-Head, 1/2-13 x 7.5" Long
47	4	207885	Bolt, Hex-Head, 1/2-13 x 2.50" Long
48	1	204872	Label, Height Indicator
49	8	201651	Bushing, Plastic, 0.50" I.D. x 0.25" Long
50	14	203474	Washer, Flat, 1.08" O.D.
51	2	202862	Spacer, 0.53" ID x 1.19" Long, Plastic, Black
52	1		Rim
53	1		Net
54	4	208481	Spacer, Steel 0.50" I.D.x 0.875" O.D.x 0.465" Long

Item	Qty	Part No.	Description
55	1	203274	Pad, Foam
56	4	201611	Bolt, Hex-Flange, 5/16-18 x 3" Long
57	1	574090	Label, Height Adjustment and Moving
58	4	203100	Nut, Hex-Flange, 5/16-18
59	1	206048	T-Bolt 3/8-16 x 3" Long
60	2	204558	Screw, Self Tapping, 1/4
61	1	900033	Rim Bracket, Black
62	1		Rim Cover

Item	Qty	Part No.	Description
63	1	200318	Spring Bracket, Zinc
64	1	208760	Spring
65	1	203470	Washer, 9/16"
66	1	203795	Hex Nut, 3/8-18
67	1	600077	Stadium Pad, Bottom
68	1	600078	Stadium Pad, Top
69	1	203124	Ground Stake

SAFETY LABELS




NOTICE

APPLY THE SAFETY LABELS TO THE COMPLETED ASSEMBLY PRIOR TO USE.

HEIGHT ADJUSTMENT


Rotate crank handle to raise and lower backboard.

Do not over crank handle beyond the manufactured height indicator range of 7-1/2 - 10 feet. Damage may be caused to the screw jack's internal adjustment mechanism if adjusted over 10 or under 7-1/2 feet.

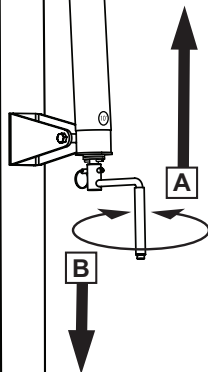

MOVING SYSTEM

1. Adjust basketball backboard height to lowest position.
2. Rotate handle forward until wheels engage ground.
3. Move basketball system to desired location.
4. Rotate handle back to original position.
5. Check system for stability.

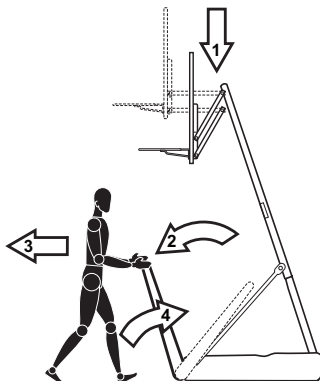

574090 12/06



WARNING

Read and understand warnings listed below before using this product.

Failure to follow these warnings may result in serious injury and/or property damage.

Owner must ensure that all players know and follow these rules for safe operation of the system.

- DO NOT HANG on the rim or any part of the system including backboard, support braces or net.
- During play, especially when performing dunk type activities, keep player's face away from the backboard, rim and net. Serious injury could occur if teeth/face come in contact with backboard, rim or net.
- Do not slide, climb, shake or play on base and/or pole.
- After assembly is complete, fill system completely with water or sand and stake to the ground. Never leave system in an upright position without filling base with weight, as system may tip over causing injuries.
- When adjusting height or moving system, keep hands and fingers away from moving parts.
- Do not allow children to move or adjust system.
- During play, do not wear jewelry (rings, watches, necklaces, etc.). Objects may entangle in net.
- Surface beneath the base must be smooth and free of gravel or other sharp objects. Punctures cause leakage and could cause system to tip over.
- Keep organic material away from pole base. Grass, litter, etc. could cause corrosion and/or deterioration.
- Check pole system for signs of corrosion (rust, pitting, chipping) and repaint with exterior enamel paint. If rust has penetrated through the steel anywhere, replace pole immediately.
- Check system before each use for proper ballast, loose hardware, excessive wear and signs corrosion and repair before use.
- Check system before each use for instability.
- Do not use system during windy and/or severe weather conditions; system may tip over. Place system in the storage position and/or in an area protected from the wind and free from personal property and/or overhead wires.
- Never play on damaged equipment.
- See instruction manual for proper installation and maintenance.
- When moving system, use caution to keep mechanism from shifting.
- Keep pole top covered with cap at all times.
- Do not allow water in tank to freeze. During sub-freezing weather add 2 gallons of non-toxic antifreeze, sand or empty tank completely and store. (Do not use salt.)
- While moving system, do not allow anyone to stand or sit on base or have added ballasting on base.
- Do not leave system unsupervised or play on system when wheels are engaged for moving.
- Use Caution when moving system across uneven surfaces. System may tip over.
- Use extreme caution if placing system on sloped surface. System may tip over more easily.

SPALDING

In the U.S.: 1-800-558-5234
In Canada: 1-800-284-8339
In Australia: 1-300-387-582

SURE SHOT

In the U.S.: 1-800-558-5234

RUSSELL

Trademarks registered
in the USA and other countries.

ID#: 55679001 02/12

HYDRA-RIB

In the U.S.: 1-800-334-9111

HUFFY SPORTS

In the U.S.: 1-800-558-5234
In Canada: 1-800-284-8339