


REQUIRED TOOLS AND MATERIALS:




- 2 Capable Adults



- Carpenter's Level



- 15' Tape Measure



- Shovel & Post Hole Digger



- Safety Goggles



-



- Container to Mix

- (2 each) Wrenches and/or Socket Wrenches and Sockets (Deep-Well Sockets are Recommended).



15/16"

AND/OR




15/16"



- Extension is Recommended


OPTIONAL TOOLS AND MATERIALS:

- Large and Small Adjustable Wrenches



Ground Tube Owner's Manual Supplement

1-800-Spalding

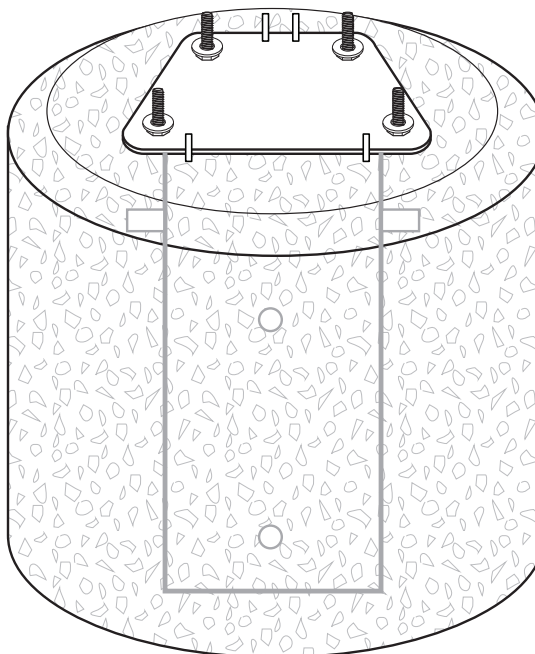

Adult Assembly Required.

This manual, accompanied by sales receipt, should be saved and kept on hand as a convenient reference, as it contains important information about your model.

⚠ WARNING!

READ AND UNDERSTAND
OPERATOR'S MANUAL
BEFORE USING THIS UNIT.

FAILURE TO FOLLOW
OPERATING INSTRUCTIONS
COULD RESULT IN INJURY
OR DAMAGE TO
PROPERTY.

Write Model Number
From Box Here:

Toll-Free Customer Service Number for U.S: 1-800-558-5234,

For Canada: 1-800-284-8339,

For Europe: 00 800 555 85234 (Sweden: 009 555 85234),

For Australia: 1300 367 582


Internet Address: <http://www.spalding.com> www.spalding.com.au

PARTS LIST (SEE PARTS IDENTIFIER)

<input checked="" type="checkbox"/>	<u>Item</u>	<u>Qty.</u>	<u>Part No.</u>	<u>Description</u>
<input type="checkbox"/>	1	1		Tube, Ground Anchor, Black
<input type="checkbox"/>	2	3	204993	Rebar, .5" diameter, 18" Long
<input type="checkbox"/>	3	4	204057	Nut, Hex, 5/8-11, Black Oxide

* You May Have Extra Parts With This Model.


PARTS IDENTIFIER

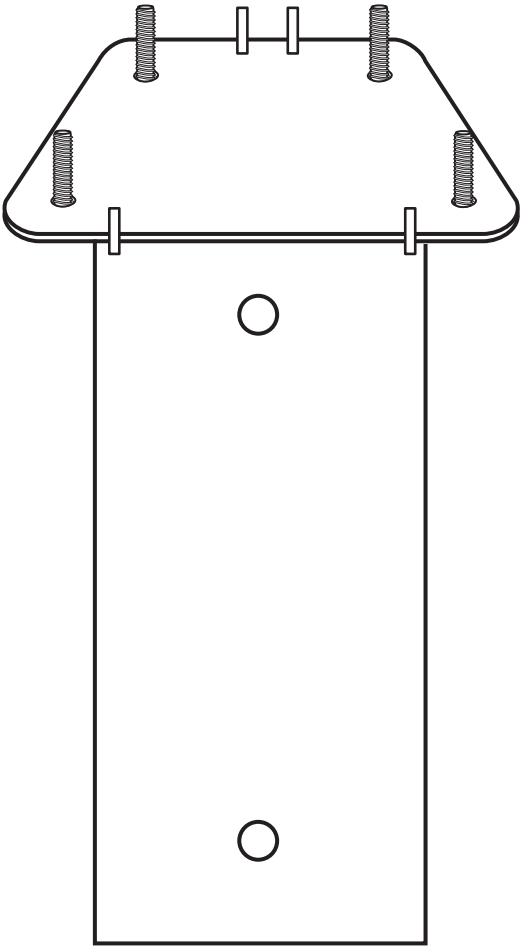

#1 (1)



#2 (3)



#3 (4)



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE SAFETY INSTRUCTIONS MAY RESULT IN SERIOUS INJURY, PROPERTY DAMAGE AND WILL VOID WARRANTY.



Owner must ensure that all players know and follow these rules for safe operation of the system.

To ensure safety, do not attempt to assemble this system without following the instructions carefully. Proper and complete assembly, use and supervision is essential for proper operation and to reduce the risk of accident or injury. A high probability of serious injury exists if this system is not installed, maintained, and operated properly. Check entire box and inside all packing material for parts and/or additional instructional material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document.




- If using a ladder during assembly, use extreme caution.
- Two (2) capable adults are recommended for this operation.
- Seat the pole sections properly. Failure to do so could allow the pole sections to separate during play.
- Before digging, contact utility company to locate underground power cables, gas, and water lines. Ensure there are no overhead power lines within 20 ft. (7 m) radius of pole location.
- Climate, corrosion, excessive use, or misuse could result in system failure.
- If technical assistance is required, contact Customer Service.
- Minimum operational height is 6' 6" (1.98 m) to the bottom of backboard.
- This equipment is intended for home recreational use only and NOT excessive competitive play.
- Read and understand the warning labels.
- The life of your basketball pole depends on many conditions. The climate, placement of the pole, the location of the pole, exposure to corrosives such as pesticides, herbicides, or salts are all important.
- Adult supervision is recommended when adjusting height.
- Serious injury could occur if teeth/face come in contact with backboard, net, or rim.

*Most injuries are caused by misuse and/or not following instructions.
Use caution when using this system.*

1. Ensure ground is level with playing surface, then dig pole hole.

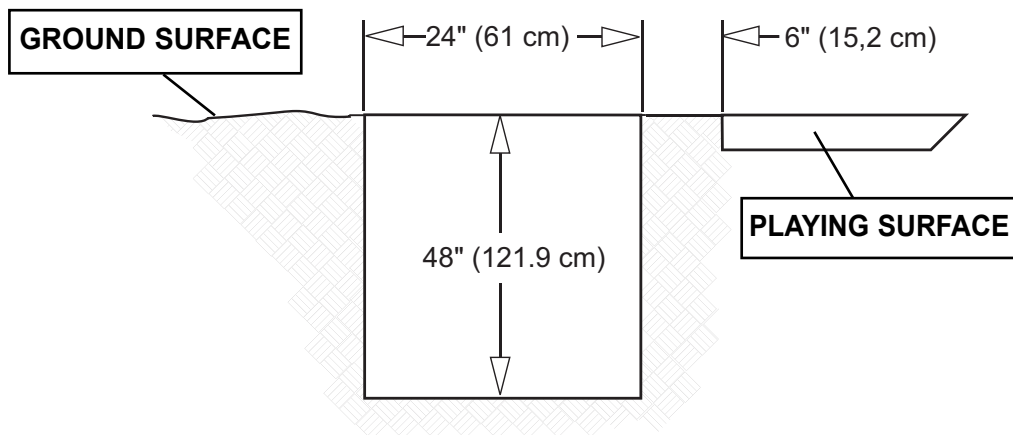
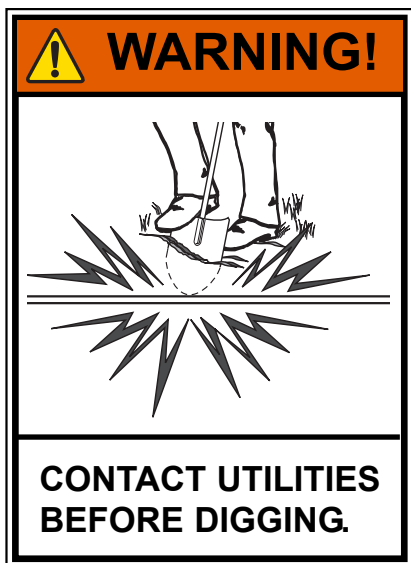


2. Install nuts (3) onto the ground tube bolts as shown.

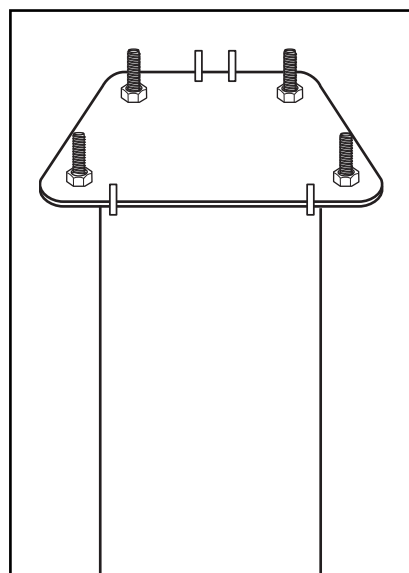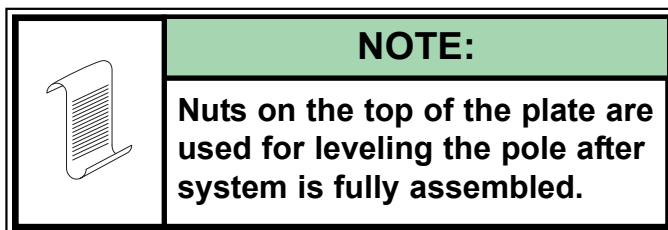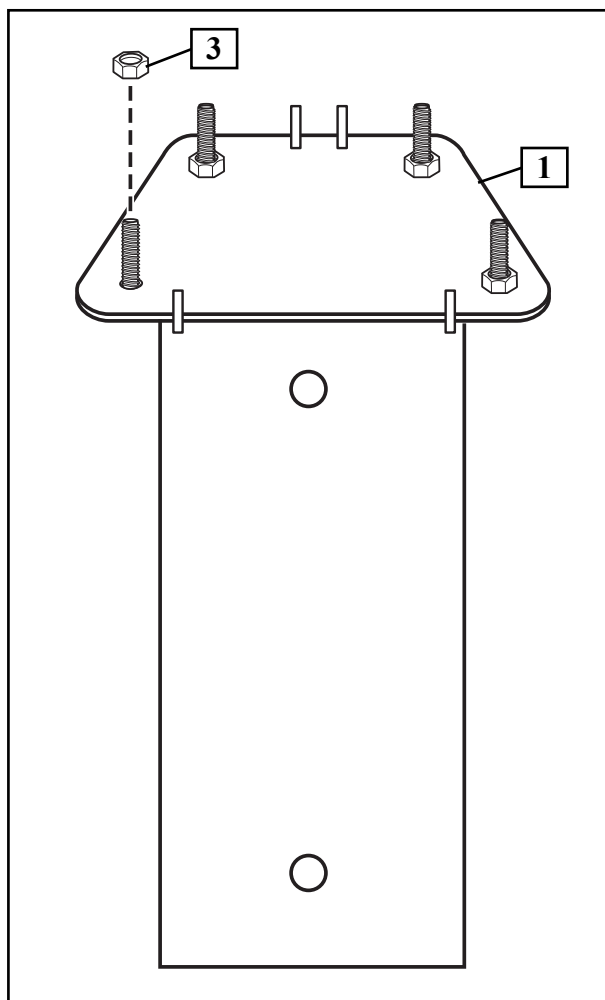



3.

Fill hole with concrete. Tamp down concrete to release air pockets and build drainage hill.

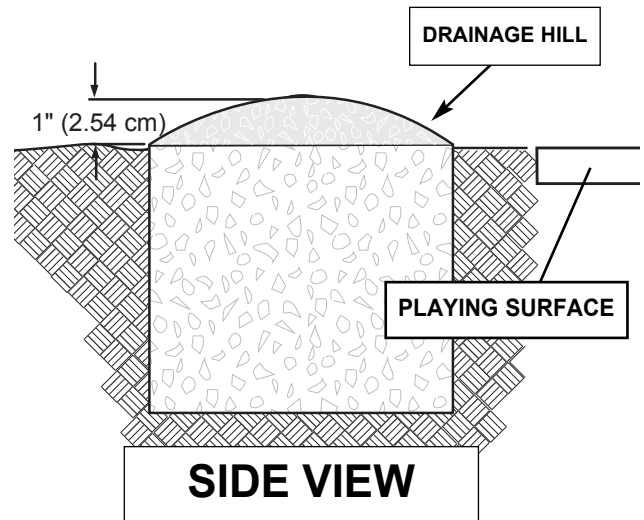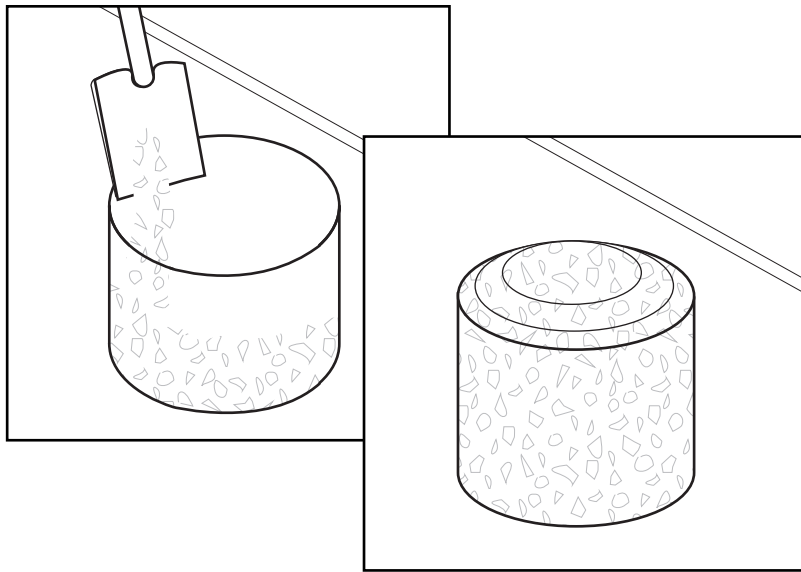


4.

Insert rebar (2) through holes in ground tube assembly (1) as shown.

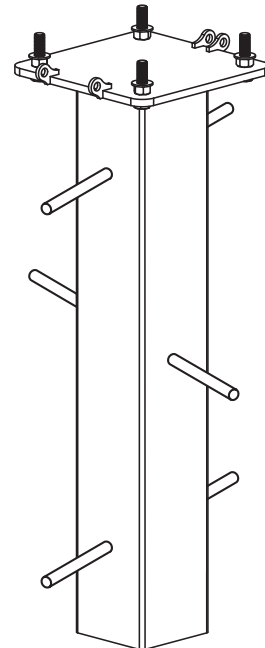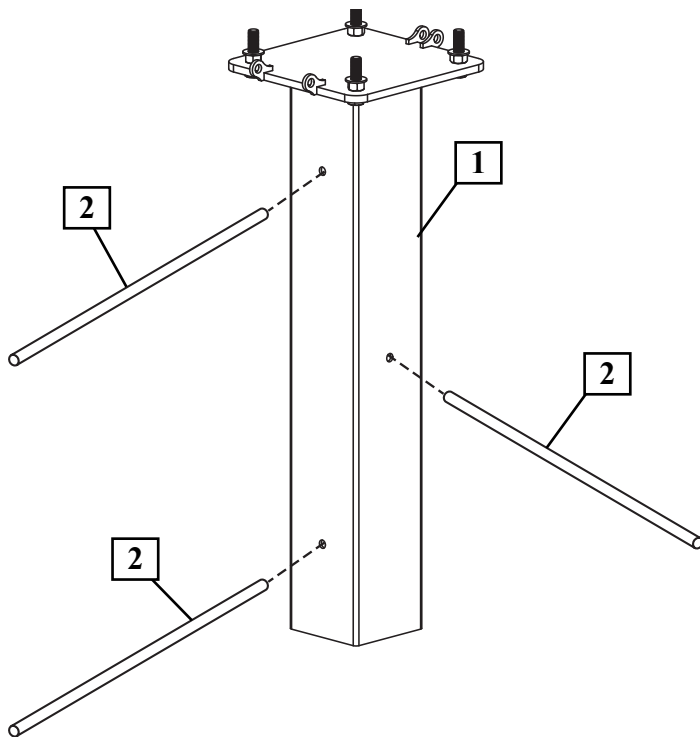

5. Insert ground tube assembly (1) into cement as shown. Move assembly around to release any air pockets in cement, then rest mounting plate on cement drainage hill. Apply some pressure to level mounting plate on top of drainage hill. Level mounting plate and square with playing surface. Clean off any excess cement on mounting plate at this time.



IMPORTANT!


Check leveling of mounting plate several times with carpenter's level while concrete is curing.



IMPORTANT!

NOTE ORIENTATION

Front of mounting plate must be parallel with playing surface.




PLAYING SURFACE



IMPORTANT!

Refer to System Owner's Manual for assembly of unit to ground tube.

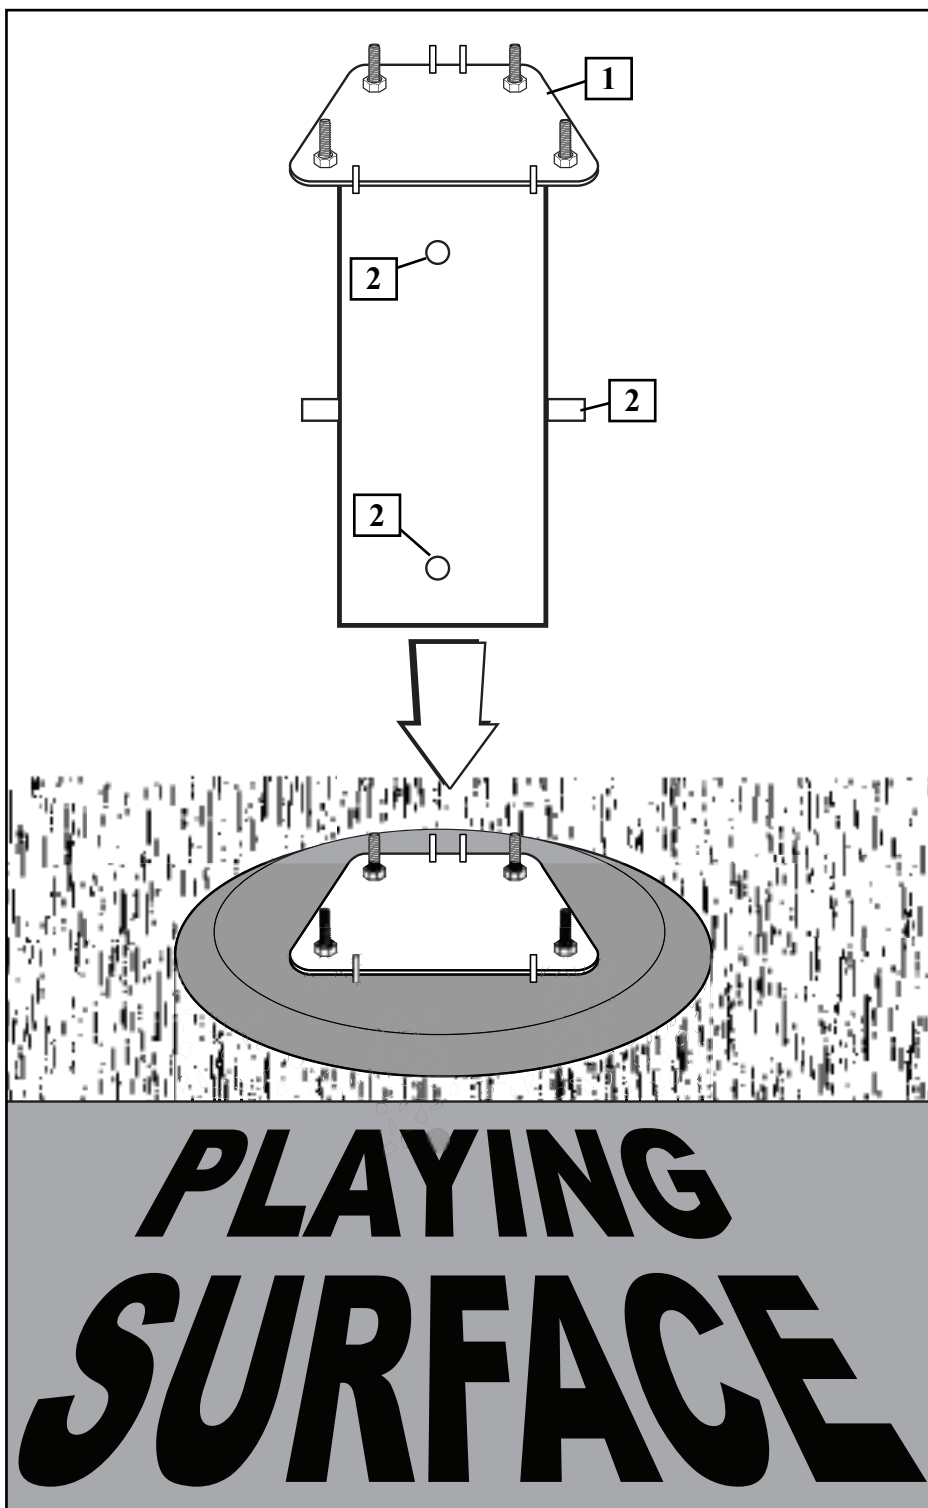

IMPORTANT!: WAIT A MINIMUM OF 72 HOURS BEFORE GOING ON TO NEXT STEP. CONCRETE MUST CURE. ALLOW ADDITIONAL TIME FOR COLD, WET OR HUMID WEATHER.